



THE ASSET MANAGEMENT PLAN FOR THE TOWNSHIP OF ASHFIELD-COLBORNE-WAWANOSH

2013




SUBMITTED DECEMBER 2013
BY PUBLIC SECTOR DIGEST
148 FULLARTON STREET, SUITE 1410
LONDON, ONTARIO, N6A 5P3



State of the Infrastructure

The Township of Ashfield-Colborne-Wawanosh

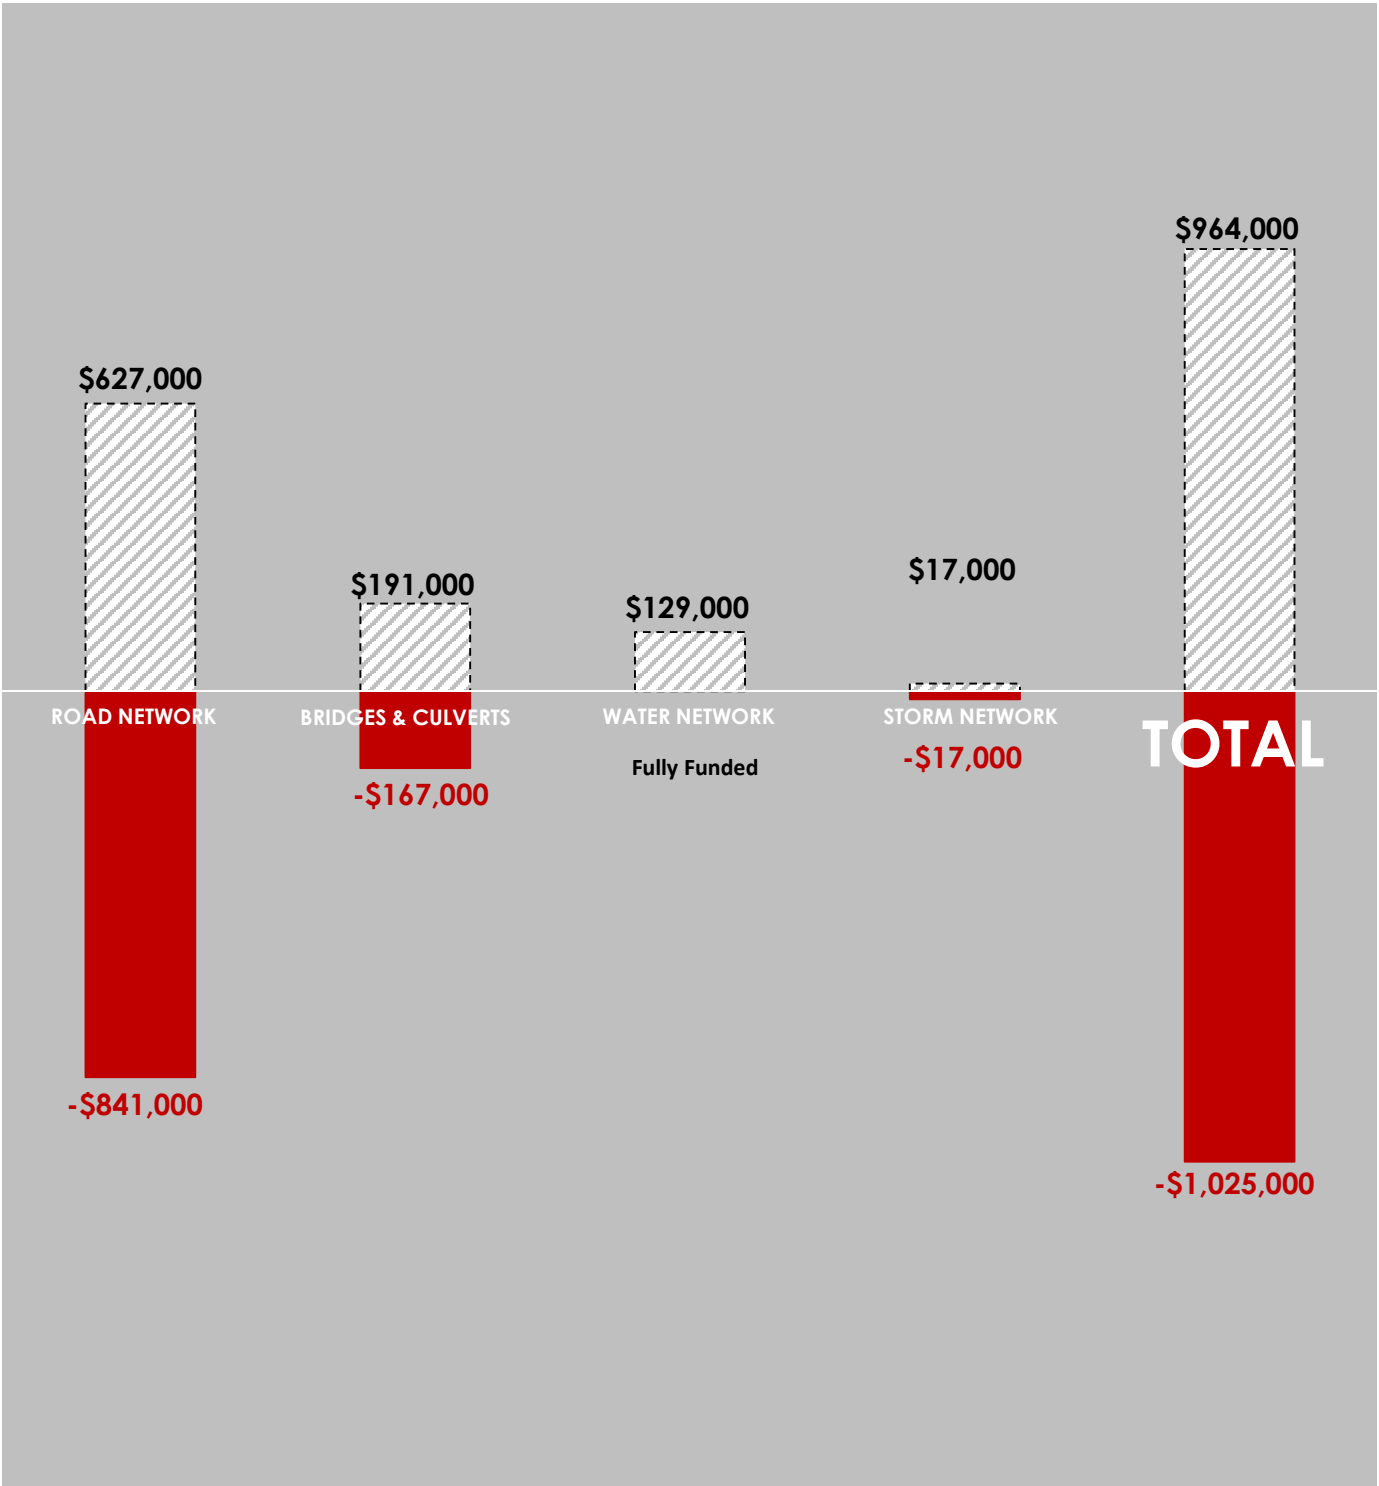AVERAGE ANNUAL FUNDING REQUIRED vs. AVERAGE ANNUAL FUNDING AVAILABLE



Total Annual Deficit: \$1,025,000

 Annual Funding Available
 Annual Funding Deficit

PUBLIC SECTOR DIGEST
INTELLIGENCE FOR THE PUBLIC SECTOR.

148 Fullarton Street, Suite 1410
London, Ontario, Canada
N6A 5P3
T: 519.690.2565 F: 519.649.2010
www.publicsectordigest.com
www.citywidesolutions.com

December 2013

The Township of Ashfield-Colborne-Wawanosh
82133 Council Line, R.R.#5
Goderich, Ontario, N7A 3Y2

Attention: Mark Becker, Clerk/Treasurer

We are pleased to submit the 2013 Asset Management Plan (AMP) for the Township of Ashfield-Colborne-Wawanosh. This AMP complies with the requirements as outlined within the provincial *Building Together Guide for Municipal Asset Management Plans*. It will serve as a strategic, tactical, and financial document, ensuring the management of the municipal infrastructure follows sound asset management practices and principles, while optimizing available resources and establishing desired levels of service. Given the broad and profound impact of asset management on the community, and the financial & administrative complexity involved in this ongoing process, we recommend that senior decision-makers from across the organization are actively involved in its implementation.

The performance of a community's infrastructure provides the foundation for its economic development, competitiveness, prosperity, reputation, and the overall quality of life for its residents. As such, we are appreciative of your decision to entrust us with the strategic direction of its infrastructure and asset management planning, and are confident that this AMP will serve as a valuable tool.

Sincerely,
The Public Sector Digest Inc.



Matthew Dawe
Vice President
mdawe@publicsectordigest.com



Israr Ahmad
Managing Editor
iahmad@publicsectordigest.com

PUBLIC SECTOR DIGEST
INTELLIGENCE FOR THE PUBLIC SECTOR.

Contacts

Matthew Dawe
Vice President
mdawe@publicsectordigest.com

Israr Ahmad
Managing Editor
iahmad@publicsectordigest.com

Christine Beneteau
Data Analyst
cbeneteau@publicsectordigest.com

Chad Gale
Data Analyst
cgale@publicsectordigest.com

Jona Mema
Data Analyst
jmema@publicsectordigest.com

Salman Zafar
Data Analyst
szafar@publicsectordigest.com

Tyler Sutton
Senior Research Analyst
tsutton@publicsectordigest.com

Matthew Van Dommelen
Regional Director
mvandommelen@publicsectordigest.com

Gabe Metron
Regional Director
gmetron@publicsectordigest.com

Holly Jennings
Account Manager
hjennings@publicsectordigest.com

LEGAL NOTICE

This report has been prepared by The Public Sector Digest Inc. ("PSD") in accordance with instructions received from the Township of Ashfield-Colborne-Wawanosh (the "Client") and for the sole use of the Client. The content of (and recommendations) this report reflects the best judgement of PSD personnel based on the information made available to PSD by the Client. Unauthorized use of this report for any other purpose, or by any third party, without the express written consent of PSD, shall be at such third party's sole risk without liability to PSD.

This report is protected by copyright.

Table of Contents

1.0 Executive Summary	4
2.0 Introduction	7
2.1 Importance of Infrastructure	7
2.2 Asset Management Plan (AMP) - Relationship to Strategic Plan	8
2.3 AMP - Relationship to other Plans	8
2.4 Purpose and Methodology	9
2.5 CityWide Software alignment with AMP	11
3.0 State of the Infrastructure	12
3.1 Objective and Scope	12
3.2 Approach	12
3.2.1 Base Data	12
3.2.2 Asset Deterioration Review	12
3.2.3 Identify Sustainable Investment Requirements	13
3.2.4 Asset Rating Criteria	13
3.2.5 Infrastructure Report Card	13
3.2.6 General Methodology and Reporting Approach	14
3.3 Road Network	15
3.3.1 What do we own?	16
3.3.2 What is it worth?	16
3.3.3 What condition is it in?	17
3.3.4 What do we need to do to it?	18
3.3.5 When do we need to do it?	18
3.3.6 How much money do we need?	19
3.3.7 How do we reach sustainability?	19
3.3.8 Recommendations	20
3.4 Bridges & Culverts	21
3.4.1 What do we own?	22
3.4.2 What is it worth?	22
3.4.3 What condition is it in?	23
3.4.4 What do we need to do to it?	24
3.4.5 When do we need to do it?	24
3.4.6 How much money do we need?	25
3.4.7 How do we reach sustainability?	25
3.4.8 Recommendations	26
3.5 Water Network	27

3.5.1 What do we own?	28
3.5.2 What is it worth?	28
3.5.3 What condition is it in?	29
3.5.4 What do we need to do to it?	29
3.5.5 When do we need to do it?	30
3.5.6 How much money do we need?	31
3.5.7 How do we reach sustainability?	31
3.5.8 Recommendations	32
3.6 Storm Sewer Network	33
3.6.1 What do we own?	34
3.6.2 What is it worth?	35
3.6.3 What condition is it in?	36
3.6.4 What do we need to do to it?	36
3.6.5 When do we need to do it?	36
3.6.6 How much money do we need?	38
3.6.7 How do we reach sustainability?	38
3.6.8 Recommendations	38
4.0 Infrastructure Report Card	39
5.0 Desired Levels of Service	40
5.1 Key factors that influence a level of service:	40
5.1.1 Strategic and Corporate Goals	40
5.1.2 Legislative Requirements	40
5.1.3 Expected Asset Performance	40
5.1.4 Community Expectations	40
5.1.5 Availability of Finances	41
5.2 Key Performance Indicators	41
5.3 Transportation Services	42
5.3.1 Service Description	42
5.3.2 Scope of Services	43
5.3.3 Performance Indicators (reported annually)	43
5.4 Water / Sanitary / Storm Networks	43
5.4.1 Service Description	43
5.4.2 Scope of services	44
5.4.3 Performance Indicators (reported annually)	44
6.0 Asset Management Strategy	45
6.1 Objective	45
6.2 Non-Infrastructure Solutions and Requirements	45
6.3 Condition Assessment Programs	45
6.3.1 Pavement Network Inspections	46
6.3.2 Bridges & Culverts (greater than 3m) Inspections	47
6.3.3 Sewer Network Inspections (Sanitary & Storm)	47
6.3.4 Water network inspections	48

6.4 AM Strategy – Life Cycle Analysis Framework	50
6.4.1 Paved Roads.....	50
6.4.2 Gravel Roads.....	52
6.4.3 Sanitary and Storm Sewers.....	52
6.4.4 Bridges & Culverts (greater than 3m span)	54
6.4.5 Water Network	54
6.5 Growth and Demand	57
6.6 Project Prioritization	57
6.6.1 Risk Matrix and Scoring Methodology.....	57
7.0 Financial Strategy	60
7.1 General overview of financial plan requirements.....	60
7.2 Financial information relating to Ashfield-Colborne-Wawanosh's AMP	61
7.2.1 Funding objective.....	61
7.3 Tax funded assets	61
7.3.1 Current funding position.....	61
7.3.2 Recommendations for full funding	62
7.4 Rate funded assets.....	63
7.4.1 Current funding position.....	63
7.5 Use of debt	64
7.6 Use of reserves.....	66
7.6.1 Available reserves	66
7.6.2 Recommendation	67
8.0 Appendix A: Report Card Calculations	68


1.0 Executive Summary

The performance of a community's infrastructure provides the foundation for its economic development, competitiveness, prosperity, reputation, and the overall quality of life for its residents. Reliable and well-maintained infrastructure assets are essential for the delivery of critical core services for the citizens of a municipality.

A technically precise and financially rigorous asset management plan, diligently implemented, will mean that sufficient investments are made to ensure delivery of sustainable infrastructure services to current and future residents. The plan will also indicate the respective financial obligations required to maintain this delivery at established levels of service.

This Asset Management Plan (AMP) for the Township of Ashfield-Colborne-Wawanosh meets all requirements as outlined within the provincial *Building Together Guide for Municipal Asset Management Plans*. It will serve as a strategic, tactical, and financial document, ensuring the management of the municipal infrastructure follows sound asset management practices and principles, while optimizing available resources and establishing desired levels of service. Given the expansive financial and social impact of asset management on both a municipality, and its citizens, it is critical that senior decision-makers, including department heads as well as the chief executives, are strategically involved.


Measured in 2012 dollars, the replacement value of the four major asset categories analyzed totaled approximately **\$86 million** for the Township of Ashfield-Colborne-Wawanosh.

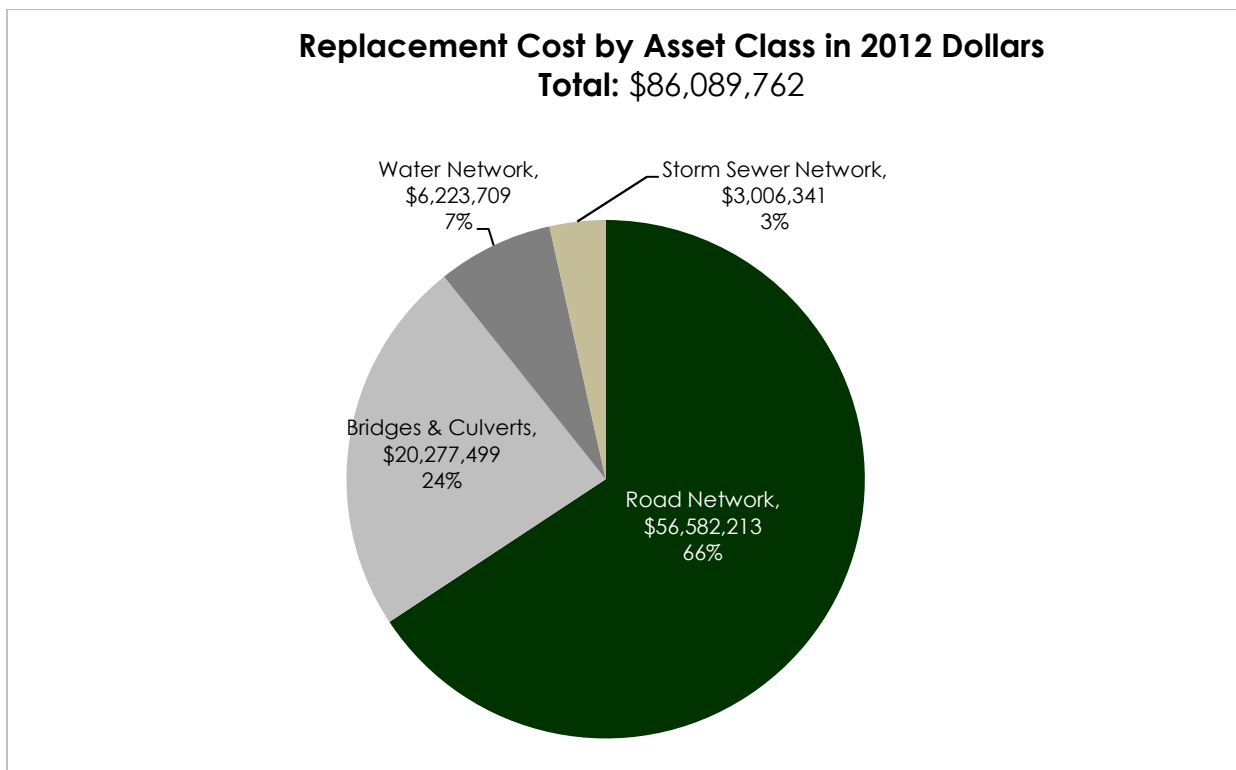

While the municipality is responsible for the strategic direction, it is the taxpayer in Ashfield-Colborne-Wawanosh who ultimately bears the financial burden. As such, a 'cost per household' (CPH) analysis was conducted for each of the asset categories to determine the financial obligation of each household in sharing the replacement cost of the municipality's assets. Such a measurement can serve as an excellent communication tool for both the administration and the council in communicating the importance of asset management to the citizen. The diagram below illustrates the total CPH, as well as the CPH for individual asset categories.

Infrastructure Replacement Cost Per Household

Total: \$67,547 per household

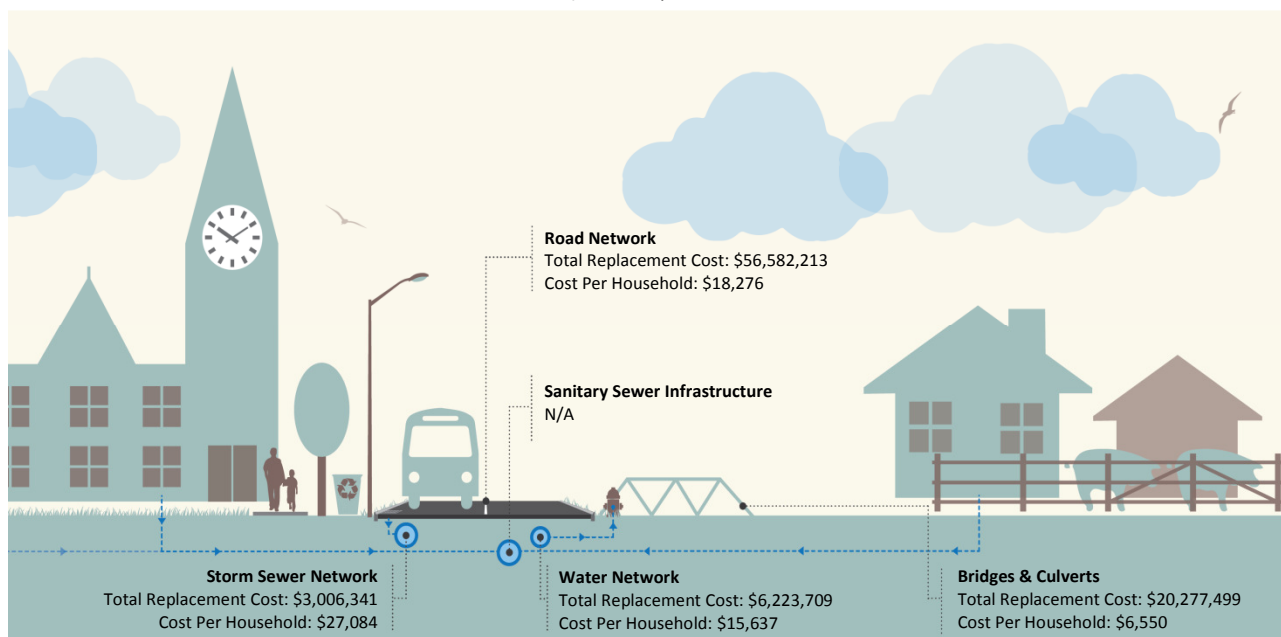

In assessing the municipality's state of the infrastructure, we examined, and graded, both the current condition (Condition vs. Performance) of the asset categories as well as the municipality's financial capacity to fund the asset's average annual requirement for sustainability (Funding vs. Need). We then generated the municipality's infrastructure report card. The municipality received a **cumulative GPA of 'C' with an annual, cumulative infrastructure deficit of \$1.03 million**. The township's grades on the Funding vs. Need dimension varied considerably across the four asset classes analyzed in this document. It received an 'A' in the water network as the municipality is full-funding the category's annual infrastructure requirements. However, a grade of 'F' was assigned in the roads network, with the municipality funding less than 50% of its annual requirements. For both the bridges & culverts asset class, and the township's storm network, a grade of 'D' was assigned.

Ashfield-Colborne-Wawanosh's grades on the Condition vs. Performance dimension were similar. While it received a 'B' and a 'B+' in water and storm networks, respectively, a grade of 'C' was assigned in the roads network. A 'C' is indicative of increasingly noticeable signs of deterioration, and a possible compromise in asset function. With a grade of 'D' in bridges & culverts, the asset class is considered in 'poor' condition, and function is inadequate. These grades also signal a substantial financial demand on the township in the short term.

For example, based on the age data only, a significant portion of the road network assets are in poor or critical condition. This has generated a significant backlog of needs which must be addressed totaling approximately \$13 million over the next 5 years. Similarly, based on the age data only, there is a noticeable percentage of bridges and large structures also in poor and critical condition, generating approximately \$6.5 million in accumulated needs. Structures are one of the highest liability assets a municipality owns.

Therefore, a high priority should be to establish a condition assessment program for this asset class—and others—to reconcile field data with age based data.

In order for an AMP to be effectively put into action, it must be integrated with financial planning and long-term budgeting. We have developed scenarios that would enable the Township of Ashfield-Colborne-Wawanosh to achieve full funding within 5 years or 10 years for the following: tax funded assets, including road network (paved roads), storm sewer network, and; rate funded assets, i.e., the water network.

The average annual investment requirement for paved roads, storm network and bridges/culverts is \$1,860,000. Annual revenue currently allocated to these assets is \$835,000 leaving an annual deficit of \$1,025,000. To put it another way, these infrastructure categories are currently funded at 45% of their long-term requirements. Ashfield-Colborne-Wawanosh has annual tax revenues of \$2,881,000 in 2013. Without consideration of any other source of revenue, full funding would require an increase in tax revenue of 35.6% over time. We recommend a 10 year option which involves full funding being achieved over 10 years by:

- a) increasing tax revenues by 3.6% each year for the next 10 years solely for the purpose of phasing in full funding to the three tax based asset categories covered by this AMP.
- b) allocating 100% of the federal gas tax revenue (currently \$170,000) to the bridges & culverts category.
- c) increasing existing and future infrastructure budgets by the applicable inflation index on an annual basis in addition to the deficit phase-in.

The average annual investment requirement for water services is \$129,000. Annual revenue currently allocated to these assets for capital purposes is \$129,000 leaving an annual deficit of \$0. To put it another way, this infrastructure category is currently funded at 100% of their long-term requirements. In 2013, Ashfield-Colborne-Wawanosh has annual water revenues of \$261,000. No change is required since full funding has been achieved.

Although the current position of water services has achieved full funding on an annual basis and provides financial sustainability over the period modeled (to 2050), Ashfield-Colborne-Wawanosh will be required to prioritize capital projects to fit the resulting annual funding available. As of 2013, age based data shows a pent up investment demand for water services of \$120,000. Prioritizing future projects will require the age based data to be replaced by condition based data. Although our recommendations include no further use of debt, the results of the condition based analysis may require otherwise.

2.0 Introduction

This Asset Management Plan meets all provincial requirements as outlined within the Ontario Building Together Guide for Municipal Asset Management Plans. As such, the following key sections and content are included:

1. Executive Summary and Introduction
2. State of the Current Infrastructure
3. Desired Levels of Service
4. Asset Management Strategy
5. Financial Strategy

The following asset classes are addressed:

1. **Road Network:** Paved & gravel roads
2. **Bridges and Culverts:** Structures greater than 3 m in span
3. **Water Network:** Water mains, valves and facilities
4. **Storm Sewer Network:** Storm sewer mains

Municipalities are encouraged to cover all asset categories in future iterations of the AMP.

This asset management plan will serve as a strategic, tactical, and financial document ensuring the management of the municipal infrastructure follows sound asset management practices and principles, while optimizing available resources and establishing desired levels of service.

At a strategic level, within the State of the Current Infrastructure section, it will identify current and future challenges that should be addressed in order to maintain sustainable infrastructure services on a long-term, life cycle basis.

It will outline a Desired Level of Service (LOS) Framework for each asset category to assist the development and tracking of LOS through performance measures across strategic, financial, tactical, operational, and maintenance activities within the organization.

At a tactical level, within the Asset Management Strategy section, it will develop an implementation process to be applied to the needs-identification and prioritization of renewal, rehabilitation, and maintenance activities, resulting in a 10 year plan that will include growth projections.

At a financial level, within the Financial Strategy section, a strategy will be developed that fully integrates with other sections of this asset management plan, to ensure delivery and optimization of the 10 year infrastructure budget.

Through the development of this plan, all data, analysis, life cycle projections, and budget models will be provided through the Public Sector Digest's CityWide suite of software products. The software and plan will be synchronized, will evolve together, and therefore, will allow for ease of updates, and annual reporting of performance measures and overall results.

This will allow for continuous improvement of the plan and its projections. It is therefore recommended that the plan be revisited and updated on an annual basis, particularly as more detailed information becomes available.

2.1 Importance of Infrastructure

Municipalities throughout Ontario, large and small, own a diverse portfolio of infrastructure assets that in turn provide a varied number of services to their citizens. The infrastructure, in essence, is a conduit for the various public services the municipality provides, e.g.:

- the roads supply a transportation network service

- the water infrastructure supplies a clean drinking water service

A community's prosperity, economic development, competitiveness, image, and overall quality of life are inherently and explicitly tied to the performance of its infrastructure.

2.2 Asset Management Plan (AMP) - Relationship to Strategic Plan

The major benefit of strategic planning is the promotion of strategic thought and action. A strategic plan spells out where an organization wants to go, how it's going to get there, and helps decide how and where to allocate resources, ensuring alignment to the strategic priorities and objectives. It will help identify priorities and guide how municipal tax dollars and revenues are spent into the future.

The strategic plan usually includes a vision and mission statement, and key organizational priorities with alignment to objectives and action plans. Given the growing economic and political significance of infrastructure, the asset management plan will become a central component of most municipal strategic plans, influencing corporate priorities, objectives, and actions.

2.3 AMP - Relationship to other Plans

An asset management plan is a key component of the municipality's planning process linking with multiple other corporate plans and documents. For example:

- **The Official Plan** – The AMP should utilize and influence the land use policy directions for long-term growth and development as provided through the Official Plan.
- **Long Term Financial Plan** – The AMP should both utilize and conversely influence the financial forecasts within the long-term financial plan.
- **Capital Budget** – The decision framework and infrastructure needs identified in the AMP form the basis on which future capital budgets are prepared.
- **Infrastructure Master Plans** – The AMP will utilize goals and projections from infrastructure master plans and in turn will influence future master plan recommendations.
- **By-Laws, standards, and policies** – The AMP will influence and utilize policies and by-laws related to infrastructure management practices and standards.
- **Regulations** – The AMP must recognize and abide by industry and senior government regulations.
- **Business Plans** – The service levels, policies, processes, and budgets defined in the AMP are incorporated into business plans as activity budgets, management strategies, and performance measures.

2.4 Purpose and Methodology

The following diagram depicts the approach and methodology, including the key components and links between those components that embody this asset management plan:



It can be seen from the above that a municipality's infrastructure planning starts at the corporate level with ties to the strategic plan, alignment to the community's expectations, and compliance with industry and government regulations.

Then, through the State of the Current Infrastructure analysis, overall asset inventory, valuation, condition and performance are reported. In this initial AMP, due to a lack of current condition data, present performance and condition are estimated by using the current age of the asset in comparison to its overall useful design life. In future updates to this AMP, accuracy of reporting will be significantly increased through the use of holistically captured condition data. Also, a life cycle analysis of needs for each infrastructure class is conducted. This analysis yields the sustainable funding level, compared against actual current funding levels, and determines whether there is a funding surplus or deficit for each infrastructure program. The overall measure of condition and available funding is finally scored for each asset class and presented as a star rating (similar to the hotel star rating) and a letter grade (A-F) within the Infrastructure Report card.

From the lifecycle analysis above, the municipality gains an understanding of the level of service provided today for each infrastructure class and the projected level of service for the future. The next section of the

AMP provides a framework for a municipality to develop a Desired Level of Service (or target service level) and develop performance measures to track the year-to-year progress towards this established target level of service.

The Asset Management Strategy then provides a detailed analysis for each infrastructure class. Included in this analysis are best practices and methodologies from within the industry which can guide the overall management of the infrastructure in order to achieve the desired level of service. This section also provides an overview of condition assessment techniques for each asset class; life cycle interventions required, including those interventions that yield the best return on investment; and prioritization techniques, including risk quantification, to determine which priority projects should move forward into the budget first.

The Financing Strategy then fully integrates with the asset management strategy and asset management plan, and provides a financial analysis that optimizes the 10 year infrastructure budget. All revenue sources available are reviewed, such as the tax levy, debt allocations, rates, reserves, grants, gas tax, development charges, etc., and necessary budget allocations are analysed to inform and deliver the infrastructure programs.


Finally, in subsequent updates to this AMP, actual project implementation will be reviewed and measured through the established performance metrics to quantify whether the desired level of service is achieved or achievable for each infrastructure class. If shortfalls in performance are observed, these will be discussed and alternate financial models or service level target adjustments will be presented.

2.5 CityWide Software alignment with AMP

The plan will be built and developed hand in hand with a database of municipal infrastructure information in the CityWide software suite of products. The software will ultimately contain the municipality's asset base, valuation information, life cycle activity predictions, costs for activities, sustainability analysis, project prioritization parameters, key performance indicators and targets, 10 year asset management strategy, and the financial plan to deliver the required infrastructure budget.

The software and plan will be synchronized, and will evolve together year-to-year as more detailed information becomes available. This synchronization will allow for ease of updates, modeling and scenario building, and annual reporting of performance measures and results. This will allow for continuous improvement of the plan and its projections. It is therefore recommended that it is revisited and updated on an annual basis.

The following diagram outlines the various CityWide software products and how they align to the various components of the AMP.

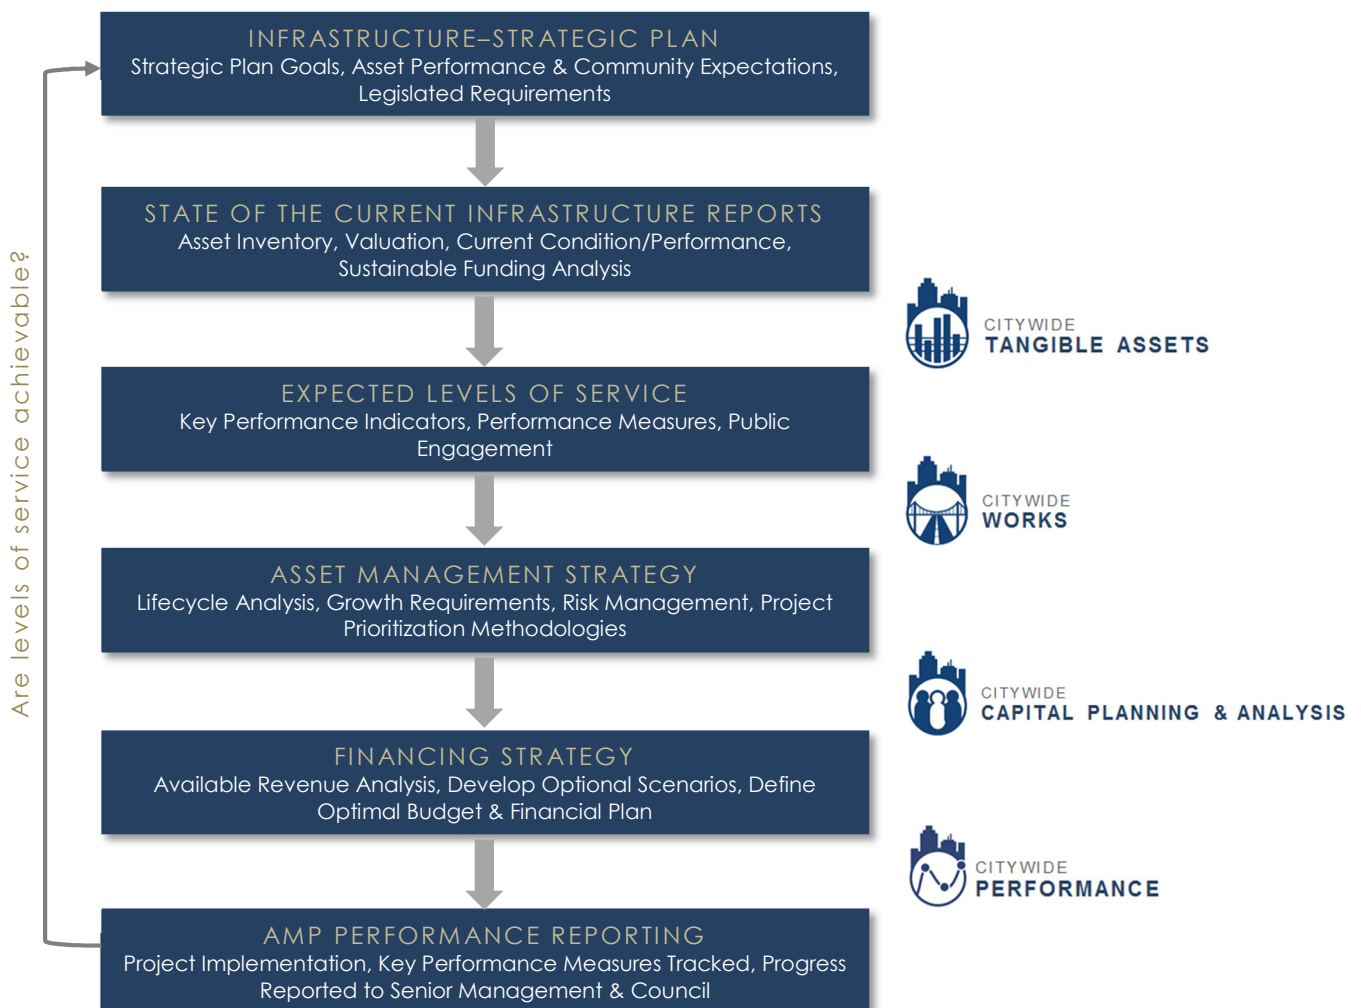

3.0 State of the Infrastructure

3.1 Objective and Scope

Objective: To identify the state of the municipality's infrastructure today and the projected state in the future if current funding levels and management practices remain status quo.

The analysis and subsequent communication tools will outline future asset requirements, will start the development of tactical implementation plans, and ultimately assist the organization to provide cost effective sustainable services to the current and future community.

The approach was based on the following key industry "State of the Infrastructure documents":

- Canadian Infrastructure Report Card
- City of Hamilton's State of the Infrastructure reports
- Other Ontario Municipal State of the Infrastructure reports

The above reports are themselves based on established principles found within key, industry best practices documents such as:

- The National Guide for Sustainable Municipal Infrastructure (Canada)
- The International Infrastructure Management Manual (Australia / New Zealand)
- American Society of Civil Engineering Manuals (U.S.A)

Scope: Within this State of the Infrastructure report a high level review will be undertaken for the following asset categories:

1. **Road Network:** Paved & gravel roads
2. **Bridges and Culverts:** Structures greater than 3 m in span
3. **Water Network:** Water mains, valves and facilities
4. **Storm Sewer Network:** Storm sewer mains

3.2 Approach

The asset categories above were reviewed at a very high level due to the nature of data and information available. Subsequent detailed reviews of this analysis are recommended on an annual basis, as more detailed conditions assessment information becomes available for each infrastructure program.

3.2.1 Base Data

In order to understand the full inventory of infrastructure assets within Ashfield-Colborne-Wawanosh Township, all tangible capital asset data, as collected to meet the PSAB 3150 accounting standard, was loaded into the CityWide Tangible Asset™ software module. This data base now provides a detailed and summarized inventory of assets as used throughout the analysis within this report and the entire Asset Management Plan.

3.2.2 Asset Deterioration Review

Without detailed condition assessment information captured holistically across entire asset networks (e.g., the sanitary sewer network), the deterioration review will rely on the 'straight line' amortization schedule approach provided from the accounting data. Although this approach is not as accurate for entire life cycle analysis as the use of detailed condition data, it does provide a reliable benchmark of future requirements. Each asset is analyzed individually. Therefore, while there may be inaccuracies in the data associated with any given asset, these imprecisions are minimized at the aggregate over entire asset categories. It is a sound approach for a high level review.

3.2.3 Identify Sustainable Investment Requirements

A gap analysis was performed to identify sustainable investment requirements for each asset category. Information on current spending levels and budgets was acquired from the organization, future investment requirements were calculated, and the gap between the two was identified.

The above analysis is performed by using investment and financial planning models, and life cycle costing analysis, embedded within the CityWide software suite of applications.

3.2.4 Asset Rating Criteria

Each asset category will be rated on two key dimensions:

- **Condition versus Performance:** What is the condition of the asset today and how well does it perform its function?
- **Funding versus Need:** Based on the actual investment requirements to ensure replacement of the asset at the right time, versus current spending levels for each asset group.

3.2.5 Infrastructure Report Card

The dimensions above will be based on a simple 1 – 5 star rating system, which will be converted into a letter grading system ranging from A-F. An average of the two ratings will be used to calculate one overall blended rating for each asset category. The outputs for all municipal assets will be consolidated within the CityWide software to produce one overall Infrastructure Report Card showing the current state of the assets and future projections for the Infrastructure.

Grading Scale: Condition vs. Performance			
What is the condition of the asset today and how well does it perform its function?			
Star Rating	Letter Grade	Color Indicator	Description
★★★★★	A		Excellent: No noticeable defects
★★★★	B		Good: Minor deterioration
★★★	C		Fair: Deterioration evident, function is affected
★★	D		Poor: Serious deterioration. Function is inadequate
★	F		Critical: No longer functional. General or complete failure

Grading Scale: Funding vs. Need		
Based on the actual investment requirements to ensure replacement of the asset at the right time, versus current spending levels for each asset group.		
Star Rating	Letter Grade	Description
★★★★★	A	Excellent: 91 to 100% of need
★★★★	B	Good: 76 to 90% of need
★★★	C	Fair: 61 to 75% of need
★★	D	Poor: 46 – 60% of need
★	F	Critical: under 45% of need

3.2.6 General Methodology and Reporting Approach

The report will be based on the seven key questions of asset management as outlined within the National Guide for Sustainable Municipal Infrastructure:

- What do you own and where is it? (inventory)
- What is it worth? (valuation / replacement cost)
- What is its condition / remaining service life? (function & performance)
- What needs to be done? (maintain, rehabilitate, replace)
- When do you need to do it? (useful life analysis)
- How much will it cost? (investment requirements)
- How do you ensure sustainability? (long-term financial plan)

The above questions will be answered for each individual asset category in the following report sections.

3.3 Road Network

D

INFRASTRUCTURE REPORT CARD GRADE



3.3 Road Network

3.3.1 What do we own?

As shown in the summary table below, the entire network comprises approximately 436 centreline km of road.

Road Network Inventory		
Asset Type	Asset Component	Quantity/Units
Road Network	Roads - Base	145,400m
	Roads - Gravel	285,350m
	Roads - Surface	150,580m
	Sidewalks	1 pool


The road network data was extracted from the Tangible Capital Asset and G.I.S. modules of the CityWide software suite.

3.3.2 What is it worth?

The estimated replacement value of the road network, in 2012 dollars, is approximately \$120.5 million. The cost per household for the road network is \$18,276 based on 3,096 households (excludes gravel roads).


Road Network Replacement Value				
Asset Type	Asset Component	Quantity/Units	2012 Unit Replacement Cost	2012 Overall Replacement Cost
Road Network	Roads - Base	145,400m	NRBCPI	\$40,659,052
	Roads - Gravel	285,350m	NRBCPI	\$63,982,679
	Roads - Surface	150,580m	NRBCPI	\$15,909,355
	Sidewalks	1 ea	NRBCPI	\$13,806
				\$120,564,893

The pie chart below provides a breakdown of each of the network components to the overall system value.

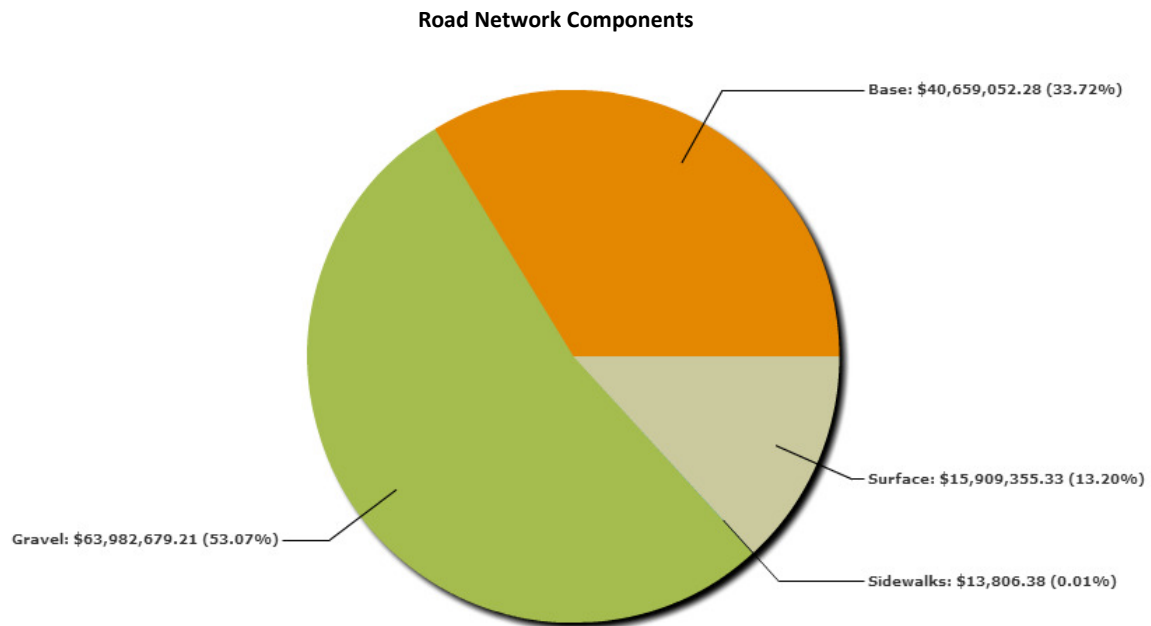

3.3.3 What condition is it in?

While 60% of the road network is in fair to excellent condition, the remaining 40% is in poor to critical condition. As such, the municipality received a Condition vs. Performance rating of 'C'.

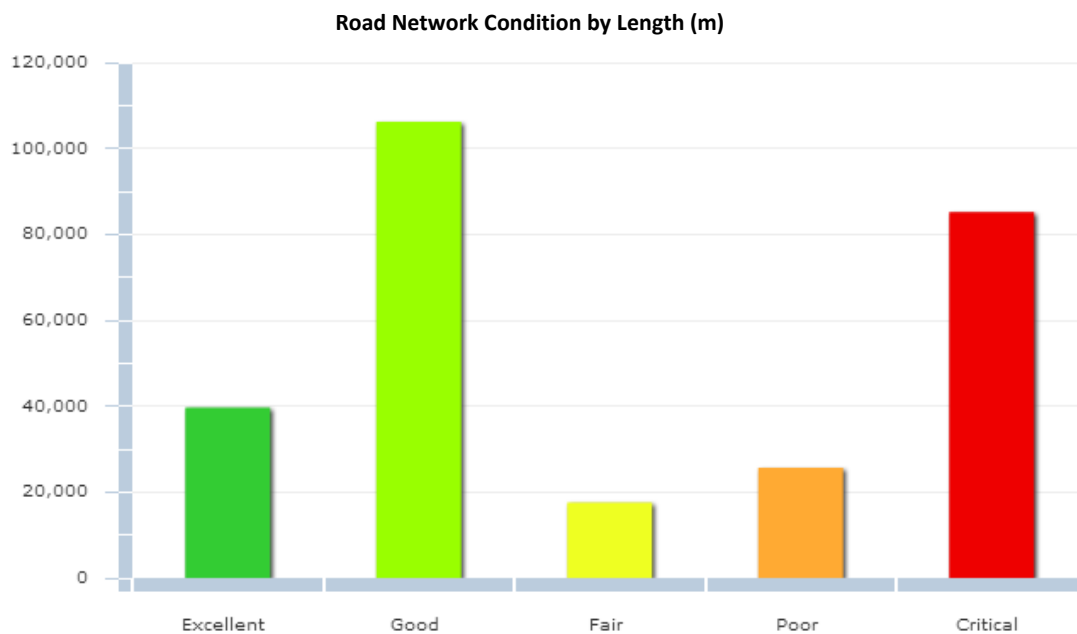

3.3.4 What do we need to do to it?

There are generally four distinct phases in an asset's life cycle that require specific types of attention and lifecycle activity. These are presented at a high level for the road network below. Further detail is provided in the "Asset Management Strategy" section of this AMP.


Addressing Asset Needs		
Phase	Lifecycle Activity	Asset Life Stage
Minor maintenance	Activities such as inspections, monitoring, sweeping, winter control, etc.	1 st Qtr
Major maintenance	Activities such as repairing pot holes, grinding out roadway rutting, and patching sections of road.	2 nd Qtr
Rehabilitation	Rehabilitation activities such as asphalt overlays, mill and paves, etc.	3 rd Qtr
Replacement	Full road reconstruction	4 th Qtr

3.3.5 When do we need to do it?

For the purpose of this report, 'useful life' data for each asset class was obtained from the accounting data within the CityWide software database. This proposed useful life is used to determine replacement needs of individual assets. These needs are calculated and quantified in the system as part of the overall financial requirements.

Asset Useful Life in Years		
Asset Type	Asset Component	Useful Life in Years
Road Network	Roads - Base	100
	Roads - Gravel	100
	Roads - Surface	15
	Sidewalks	15

As field condition information becomes available, the data can be loaded into the CityWide system to increase the accuracy of current asset age and, therefore, that of future replacement requirements. The following table shows the projection of road network replacement costs based on the age of the asset only.

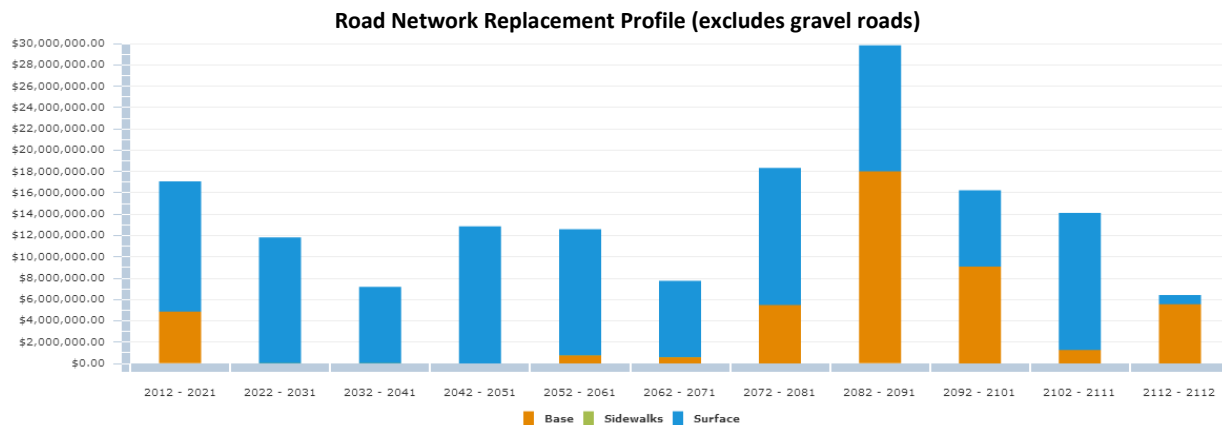


3.3.6 How much money do we need?

The analysis completed to determine capital revenue requirements was based on the following constraints and assumptions:

1. Replacement costs are based upon the unit costs identified within the "What is it worth?" section.
2. The timing for individual road replacement was defined by the replacement year as described in the "When do you need to do it?" section.
3. All values are presented in 2012 dollars.
4. The analysis was run for a 100 year period to ensure all assets went through at least one iteration of replacement, therefore providing a sustainable projection.

3.3.7 How do we reach sustainability?

Based upon the above parameters, the average annual revenue required to sustain Ashfield-Colborne-Wawanosh's paved road network is approximately **\$1,468,000**. Based on Ashfield-Colborne-Wawanosh's current annual funding of **\$627,000**, there is an annual **deficit of \$841,000**. As such, the municipality received a Funding vs. Need rating of 'F'. The following table illustrates the expenditure requirements in five year increments against the sustainable funding threshold line.

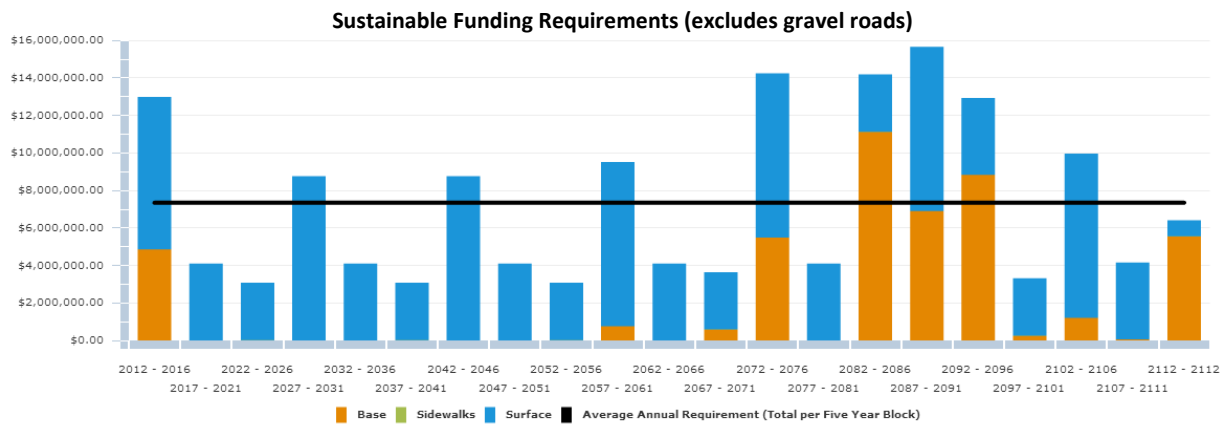

In conclusion, based on the age data only, a significant portion of the road network assets are in poor or critical condition. This has generated a significant backlog of needs within the road network that must be addressed totaling approximately \$13 million over the next 5 years. A condition assessment program should be established to aid in prioritizing overall needs for rehabilitation and replacement and to assist with optimizing the long and short term budgets. Further detail is outlined within the "Asset Management Strategy" section of this AMP.

3.3.8 Recommendations

The municipality received an overall rating of 'D' for its road network, calculated from the Condition vs. Performance and the Funding vs. Need ratings. Accordingly, we recommend the following:

1. A condition assessment program should be established for the entire paved road network to gain a better understanding of current condition and performance as outlined further within the "Asset Management Strategy" section of this AMP.
2. As approximately 65% of the township's road network comprises gravel roads, a detailed study should be undertaken to assess the overall maintenance costs of gravel roads and whether there is benefit of converting some gravel roads to paved roads to reduce future costs. This is further detail outlined within the "Asset Management Strategy" section of this AMP.
3. Once the above studies are complete or underway, the condition data should be loaded into the CityWide software and an updated "current state of the infrastructure" analysis should be generated.
4. An appropriate % of asset replacement value should be used for operations and maintenance activities on an annual basis. This should be determined through a detailed analysis of O & M activities and be added to future AMP reporting.
5. The Infrastructure Report Card should be updated on an annual basis.

3.4 Bridges & Culverts

D

INFRASTRUCTURE REPORT CARD GRADE



3.4 Bridges & Culverts

3.4.1 What do we own?

As shown in the summary table below the township owns 17 bridges and 54 culverts (excluding outliers where no data was available).

Bridges & Culverts Inventory		
Asset Type	Asset Component	Count/Quantity
Bridges & Culverts	Bridge Foundation	17
	Bridge Guide Rails	4
	Bridge Deck/Surface	17 each/3,706m ²
	Culverts - Corrugated Steel	6
	Culverts - Replacements	10
	Culverts - Guide Rails	8
	Culverts - Structure	48 each/3,243.99m ²
	Culverts - London Road	1


The bridges & culverts data was extracted from the Tangible Capital Asset and G.I.S. modules of the CityWide software suite.

3.4.2 What is it worth?

The estimated replacement value of the township's bridges & culverts, in 2012 dollars, is approximately \$20 million. The cost per household for bridges & culverts is \$6,550 based on 3,096 households.



Bridges & Culverts Replacement Value			
Asset Type	Asset Component	Count/Quantity	2012 Replacement Cost
Bridges & Culverts	Bridge Foundation	17	\$5,101,037
	Bridge Guide Rails	4	\$133,280
	Bridge Deck/Surface	17 each/3,706m ²	\$6,777,611
	Culverts - Corrugated Steel	6 each/595.36m ²	\$1,157,845
	Culverts - Replacements	10	\$39,871
	Culverts - Guide Rails	8	\$224,672
	Culverts - Structure	48 each/3,243.99m ²	\$6,765,170
	Culverts - London Road	1	\$78,013
			\$20,277,499

The pie chart below provides a breakdown of each of the bridges & culverts components to the overall structures value.

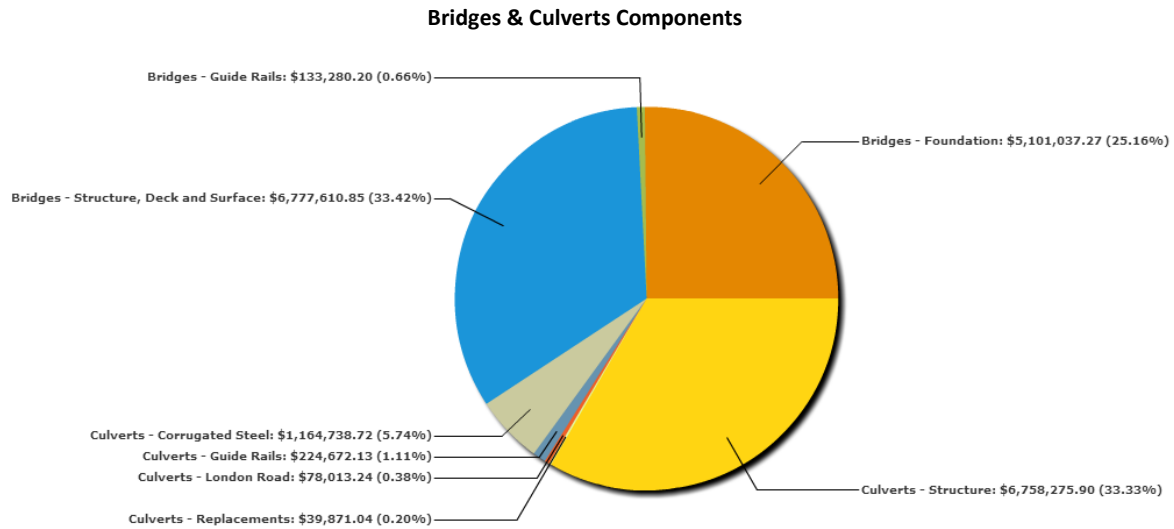

3.4.3 What condition is it in?

Based on area, more than 70% of the municipality's bridges & culverts are in poor to critical condition. Further, based on quantity, an additional 50% are in poor to critical condition. As such, the municipality received a Condition vs. Performance rating of 'D'.

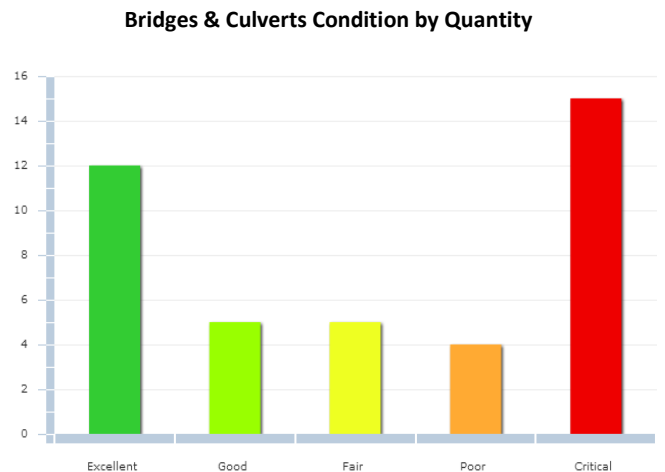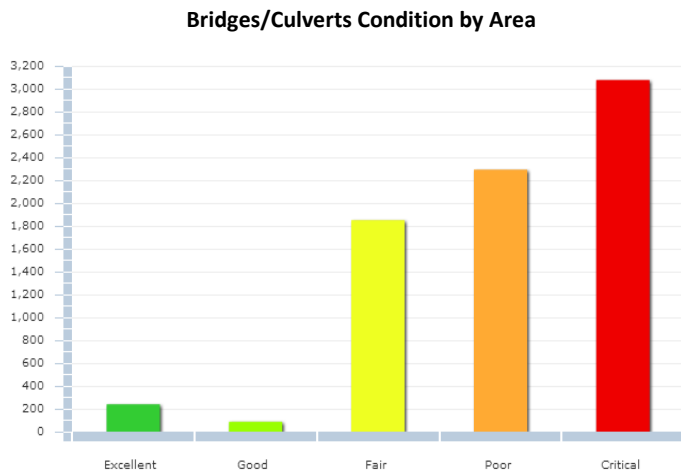

3.4.4 What do we need to do to it?

There are generally four distinct phases in an asset's life cycle. These are presented at a high level for the bridge and culvert structures below. Further detail is provided in the "Asset Management Strategy" section of this AMP.

Addressing Asset Needs		
Phase	Lifecycle Activity	Asset Life Stage
Minor Maintenance	activities such as inspections, monitoring, sweeping, winter control, etc.	1 st Qtr
Major Maintenance	activities such as repairs to cracked or spalled concrete, damaged expansion joints, bent or damaged railings, etc.	2 nd Qtr
Rehabilitation	rehabilitation events such as structural reinforcement of structural elements, deck replacements, etc.	3 rd Qtr
Replacement	full structure reconstruction	4 th Qtr


3.4.5 When do we need to do it?

For the purpose of this report, 'useful life' data for each asset class was obtained from the accounting data within the CityWide software database. This proposed useful life is used to determine replacement needs of individual assets, which are calculated in the system as part of the overall financial requirements.

Asset Useful Life in Years		
Asset Type	Asset Component	Useful Life in Years
Bridges & Culverts	Bridges - Foundation	80
	Bridges – Guide Rails	30
	Bridges – Deck/Surface	40
	Culverts – Corrugated Steel	50
	Culverts - Replacements	50
	Culverts – Guide Rails	30
	Culverts - Structure	80
	Culverts – London Road	80

As field condition information becomes available in time, the data should be loaded into the CityWide system in order to have an increasingly more accurate picture of current asset age and, therefore, future replacement requirements. The following table shows the current projection of structure replacements based on the age of the asset only.

Structures Replacement Profile

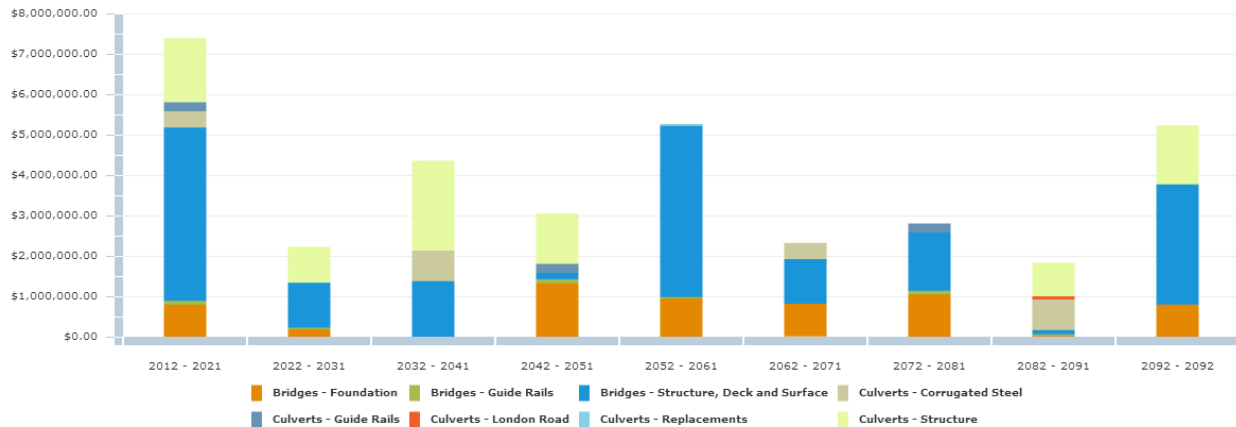

3.4.6 How much money do we need?


The analysis completed to determine capital revenue requirements was based on the following constraints and assumptions:

1. Replacement costs are based upon the "What is it worth?" section above.
2. The timing for individual structure replacement was defined by the replacement year as described in the "When do you need to do it?" section above.
3. All values are presented in 2012 dollars.
4. The analysis was run for an 80 year period to ensure all assets cycled through at least one iteration of replacement, therefore providing a sustainable projection.

3.4.7 How do we reach sustainability?

Based upon the above assumptions, the average annual revenue required to sustain Ashfield's bridges & culverts is **\$358,000**. Based on Ashfield's current annual funding of **\$191,000**, there is an annual **deficit of \$167,000**. The municipality received a Funding vs. Need rating of 'D'. The following graph presents five year blocks of expenditure requirements against the sustainable funding threshold line.

Sustainable Revenue Requirement

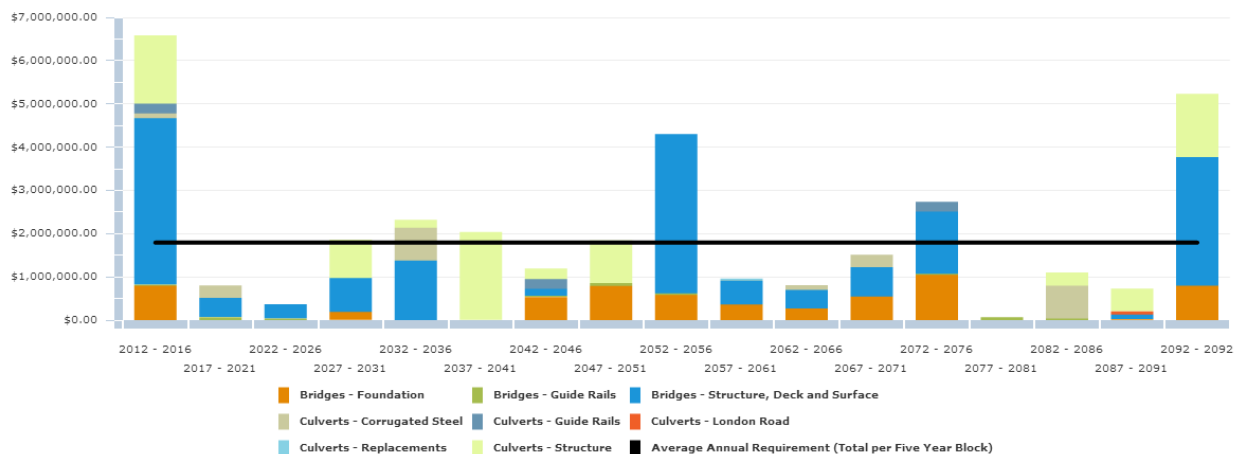


In conclusion, based on the age data only, there is a noticeable percentage of bridges and large structures in poor and critical condition. There are significant needs to be addressed within the next 5 years totaling approximately \$6.5 million. Structures are one of the highest liability assets a municipality owns. Therefore, a high priority should be to establish a condition assessment program and/or enter completed condition results into the CityWide software for further analysis. A full analysis of field condition will aid in prioritizing overall needs for rehabilitation and replacement and will assist with optimizing the long and short term budgets. Further detail is outlined within the "Asset Management Strategy" section of this AMP.

3.4.8 Recommendations

The municipality received an overall rating of 'D' for its bridges & culverts, calculated from the Condition vs. Performance and the Funding vs. Need ratings. Accordingly, we recommend the following:

1. As a result of the condition assessment policy and the subsequent OSIM inspections, condition data should be loaded into the CityWide software and an updated 'current state of the infrastructure' analysis should be generated.
2. An appropriate % of asset replacement value should be used for operations and maintenance activities on an annual basis. This should be determined through a detailed analysis of O & M activities and added to future AMP reporting.
3. The Infrastructure Report Card should be updated on an annual basis.

3.5 Water Network

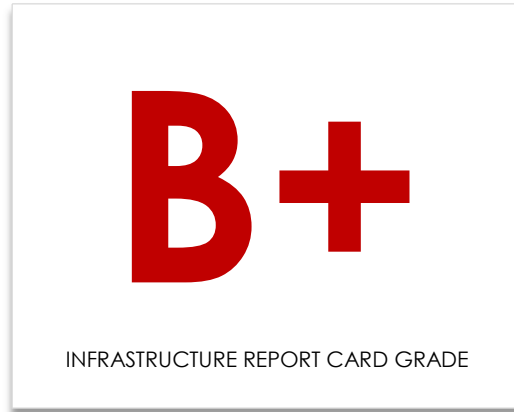

3.5 Water Network

3.5.1 What do we own?

Ashfield-Colborne-Wawanosh Township is responsible for the following water network inventory which includes approximately 15 km of water mains:

Water Network Inventory		
Asset Type	Asset Component	Quantity
Water Network	Mains - Local (less than 450mm)	14,906m
	Tees and Valves	7
	Benmiller Water Facility	1
	Century Heights Water Facility	1
	Dungannon Water Facility	1
	Huron Sands Water Facility	1
	Century Heights Water Construction	2


The water network data was extracted from the Tangible Capital Asset and G.I.S. modules of the CityWide software suite.

3.5.2 What is it worth?

The estimated replacement value of the water network, in 2012 dollars, is approximately \$6 million. The cost per household for the water network is \$15,637 based on 398 households.

Water Network Replacement Value				
Asset Type	Asset Component	Quantity	2012 Unit Replacement Cost	2012 Overall Replacement Cost
Water Network	Mains - Local (19mm)	2,725m	NRBCPI	\$368,997
	Mains - Local (25mm)	71m	NRBCPI	\$7,001
	Mains - Local (50mm)	1,392m	NRBCPI	\$460,384
	Mains - Local (100mm)	7,902m	NRBCPI	\$2,131,988
	Mains - Local (150mm)	992m	NRBCPI	\$625,683
	Mains - Local (200mm)	1,824m	NRBCPI	\$323,578
	Tees and Valves	7.00	NRBCPI	\$42,974
	Benmiller Water Facility	1	NRBCPI	\$402,483
	Century Heights Water Facility	1	NRBCPI	\$727,016
	Dungannon Water Facility	1	NRBCPI	\$754,416
	Huron Sands Water Facility	1	NRBCPI	\$258,707
	Century Heights Water Construction	2	NRBCPI	\$120,482
				\$6,223,709


The pie chart below provides a breakdown of each of the network components to the overall system value.

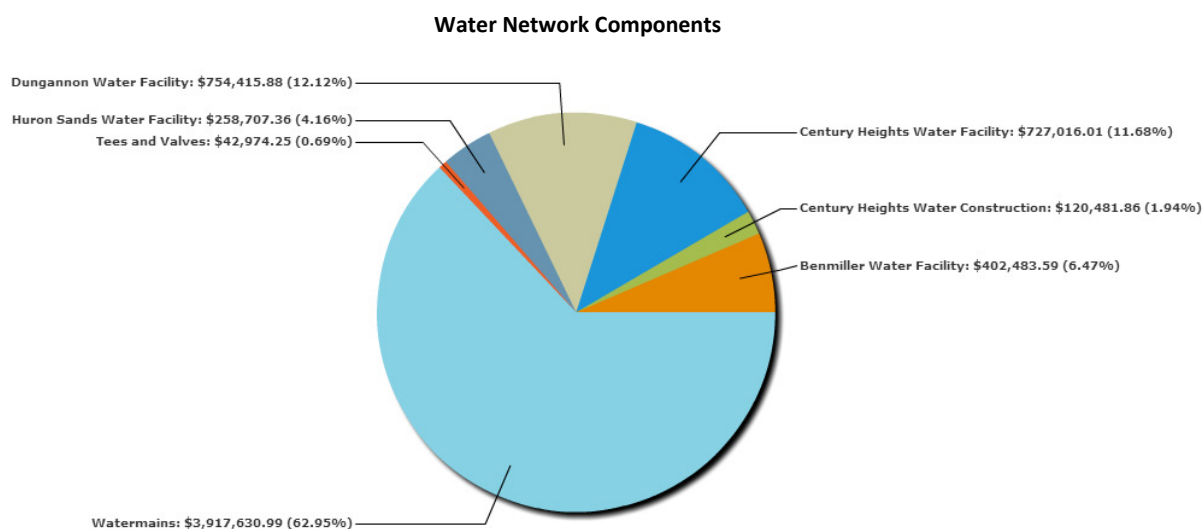


3.5.3 What condition is it in?

The vast majority, 82%, of the municipality's facilities assets, and 100% of water mains, are in fair to excellent condition. As such, the municipality received a Condition vs. Performance rating of 'B'.

Water Mains Condition by Length (m)

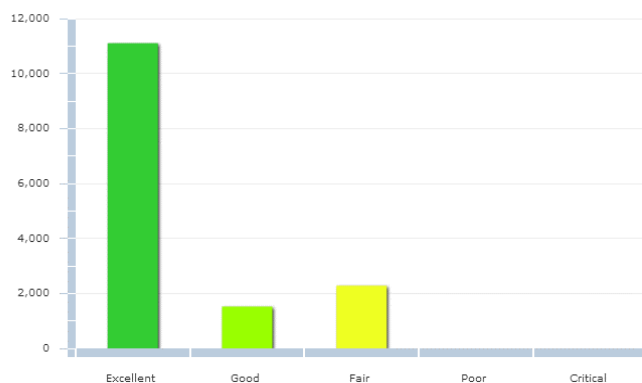

Water Facilities Condition (base on replacement value)

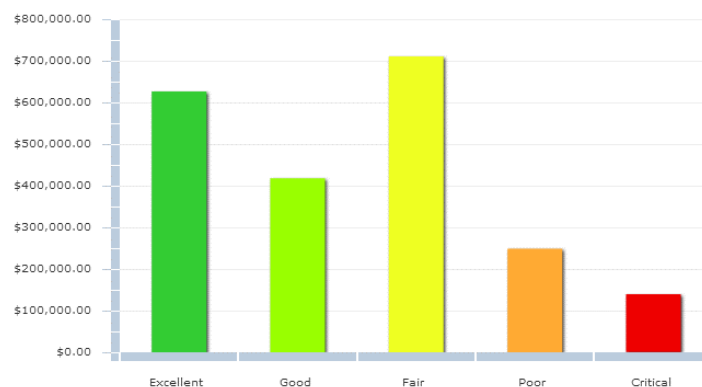

3.5.4 What do we need to do to it?

There are generally four distinct phases in an asset's life cycle. These are presented at a high level for the water network below. Further detail is provided in the "Asset Management Strategy" section of this AMP.

Addressing Asset Needs		
Phase	Lifecycle Activity	Asset Age
Minor Maintenance	Activities such as inspections, monitoring, cleaning and flushing, hydrant flushing, pressure tests, visual inspections, etc.	1st Qtr
Major Maintenance	Such events as repairing water main breaks, repairing valves, replacing individual small sections of pipe etc.	2nd Qtr
Rehabilitation	Rehabilitation events such as structural lining of pipes and a cathodic protection program to slow the rate of pipe deterioration.	3rd Qtr
Replacement	Pipe replacements	4th Qtr


3.5.5 When do we need to do it?

For the purpose of this report "useful life" data for each asset class was obtained from the accounting data within the CityWide software database. This proposed useful life is used to determine replacement needs of individual assets, which are calculated in the system as part of the overall financial requirements.

Asset Useful Life in Years		
Asset Type	Asset Component	Useful Life in Years
Water Network	Mains - Local (19mm)	75
	Mains - Local (25mm)	75
	Mains - Local (50mm)	75
	Mains - Local (100mm)	75
	Mains - Local (150mm)	75
	Mains - Local (200mm)	75
	Tees and Valves	75
	Benmiller Water Facility	20-50
	Century Heights Water Facility	20-75
	Dungannon Water Facility	20-75
	Huron Sands Water Facility	20-75
	Century Heights Water Construction	75

As field condition information becomes available in time, the data should be loaded into the CityWide system in order to increasingly have a more accurate picture of current asset age and condition, therefore, future replacement requirements. The following graph shows the current projection of water main replacements based on the age of the assets only.

Water Network Replacement Profile

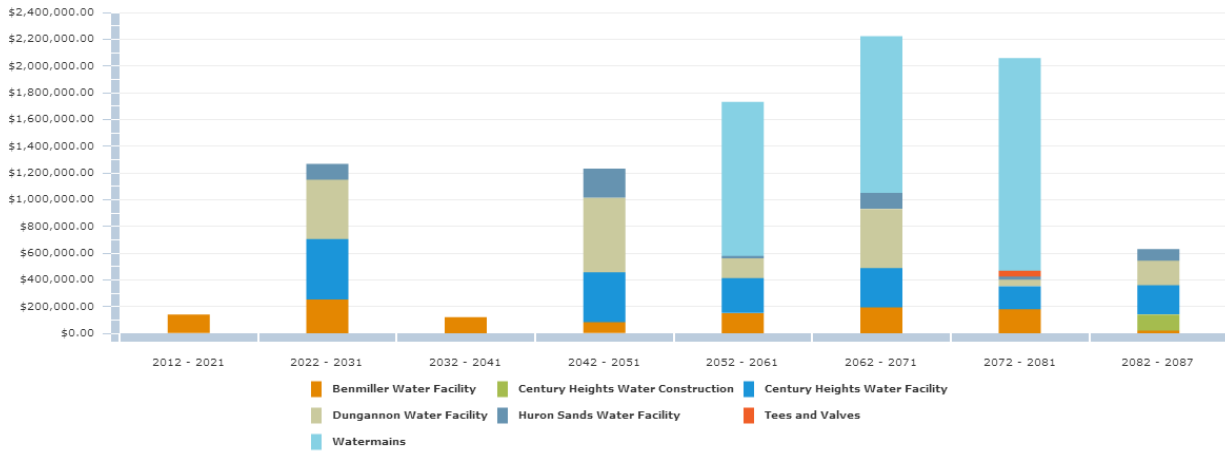

3.5.6 How much money do we need?


The analysis completed to determine capital revenue requirements was based on the following assumptions:

1. Replacement costs are based upon the unit costs identified within the "What is it worth?" section above.
2. The timing for individual water main replacement was defined by the replacement year as described in the "When do you need to do it?" section above.
3. All values are presented in 2012 dollars.
4. The analysis was run for a 75 year period to ensure all assets went through at least one iteration of replacement, therefore providing a sustainable projection.

3.5.7 How do we reach sustainability?

Based upon the above assumptions, the average annual revenue required to sustain Ashfield-Colborne-Wawanosh's water network is approximately **\$129,000**. Based on Ashfield-Colborne-Wawanosh's current annual funding of **\$129,000**, the asset class is **fully-funded**. As such, the municipality received a Funding vs. Need rating of 'A'. The following table presents five year blocks of expenditure requirements against the sustainable funding threshold line.

Sustainable Revenue Requirements

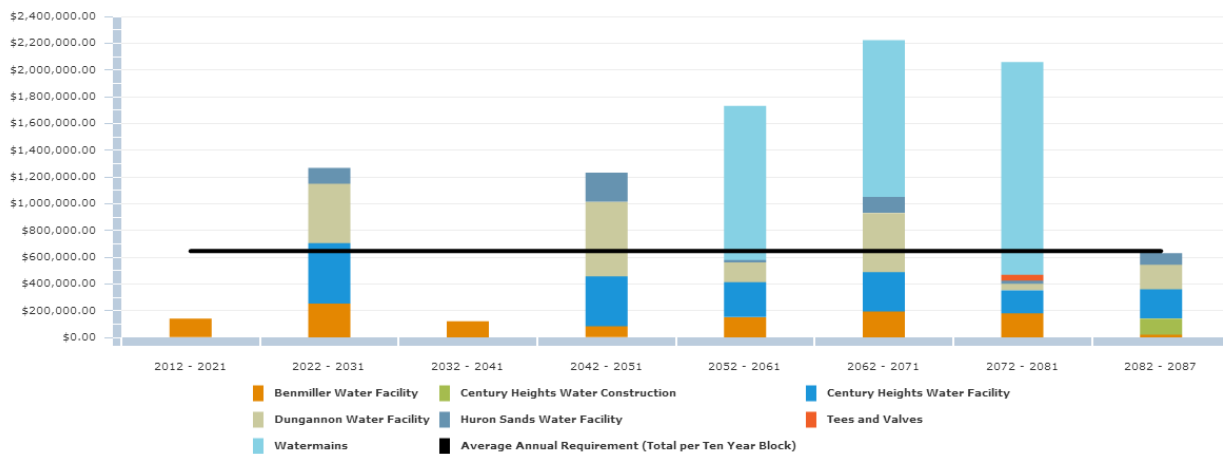


In conclusion, Ashfield-Colborne-Wawanosh's water distribution network is generally in very good condition while the facilities are generally in fair condition based on age data only. There are some facilities needs coming forward in the 5 year window, however, there are significant facilities replacement requirements within the 10 year window. A condition assessment program should be established to aid in prioritizing overall needs for rehabilitation and replacement and to assist with optimizing the long and short term budgets. Further detail is outlined within the "Asset Management Strategy" section of this AMP.

3.5.8 Recommendations

The municipality received an overall rating of 'B+' for its water network, calculated from the Condition vs. Performance and the Funding vs. Need ratings. Accordingly, we recommend the following:

1. A more detailed study to define the current condition of the water network should be undertaken as described further within the "Asset Management Strategy" section of this AMP.
2. Also, a detailed study to define the current condition of the water facilities and their components (structural, architectural, electrical, mechanical, process, etc.) should be undertaken, as collectively they account for 35% of the water infrastructure's value.
3. Once the above study is complete, a new performance age should be applied to each asset and an updated "current state of the infrastructure" analysis should be generated.
4. An appropriate % of asset replacement value should be used for operations and maintenance activities on an annual basis. This should be determined through a detailed analysis of O & M activities and be added to future AMP reporting.
5. The Infrastructure Report Card should be updated on an annual basis.

3.6 Storm Sewer Infrastructure

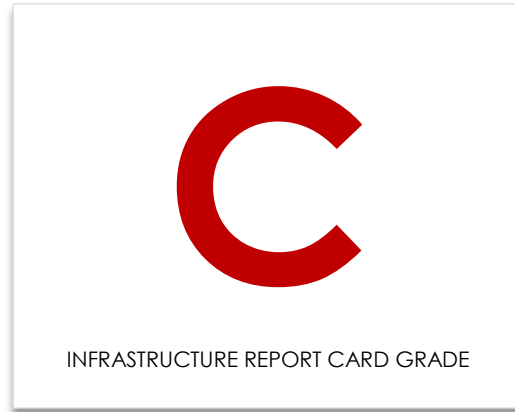

3.6 Storm Sewer Network

3.6.1 What do we own?

The inventory components of the storm sewer network are outlined in the table below.

Storm Sewer Network Inventory		
Asset Type	Asset Component	Quantity/Units
Storm Sewer Network	Mains - Local (100mm)	238.60m
	Mains - Local (300mm)	372m
	Mains - Local (375mm)	113m
	Mains - Local (450mm)	365m
	Mains - Local (500mm)	190m
	Mains - Local (525mm)	369.8m
	Mains - Local (600mm)	254m
	Mains - Local (675mm)	100m
	Catch Basins	3
	Manholes	4
	Kingsbridge Line Storm Sewer Improvement	1
	London Road Storm Sewers	1
	Galt Place Engineering	1

As shown in the summary table below the entire network consists of approximately 2 km of storm sewer main.

Storm Sewer Network Inventory – Summary		
Asset Type	Asset Component	Quantity/Units
Storm Sewer Network	Mains - Local (450mm and smaller)	1088.60m
	Mains - Local (Larger Than 450mm)	913.80m
	Catch Basins	3
	Manholes	4
	Kingsbridge Line Storm Sewer Improvement	1
	London Road Storm Sewers	1
	Galt Place Engineering	1


The storm sewer network data was extracted from the Tangible Capital Asset and G.I.S. modules of the CityWide software suite.

3.6.2 What is it worth?

The estimated replacement value of the storm sewer network, in 2012 dollars, is approximately \$3 million. The cost per household for the storm sewer network is \$27,084 based on 111 households.


Storm Sewer Network Replacement Value				
Asset Type	Asset Component	Quantity/Units	2012 Unit Replacement Cost	2012 Overall Replacement Cost
Storm Sewer Network	Mains - Local (100mm)	238.60m	NRBCPI	\$21,494
	Mains - Local (300mm)	372m	NRBCPI	\$174,102
	Mains - Local (375mm)	113m	NRBCPI	\$79,966
	Mains - Local (450mm)	365m	NRBCPI	\$113,054
	Mains - Local (500mm)	190m	NRBCPI	\$155,146
	Mains - Local (525mm)	369.8m	NRBCPI	\$126,380
	Mains - Local (600mm)	254m	NRBCPI	\$215,427
	Mains - Local (675mm)	100m	NRBCPI	\$23,261
	Catch Basins	3	NRBCPI	\$8,815
	Manholes	4	NRBCPI	\$16,249
	Kingsbridge Line Storm Sewer Improvement	1	NRBCPI	\$1,651,803
	London Road Storm Sewers	1	NRBCPI	\$412,019
	Galt Place Engineering	1	NRBCPI	\$8,625
				\$3,006,341

The pie chart below provides a breakdown of each of the network components to the overall system value.

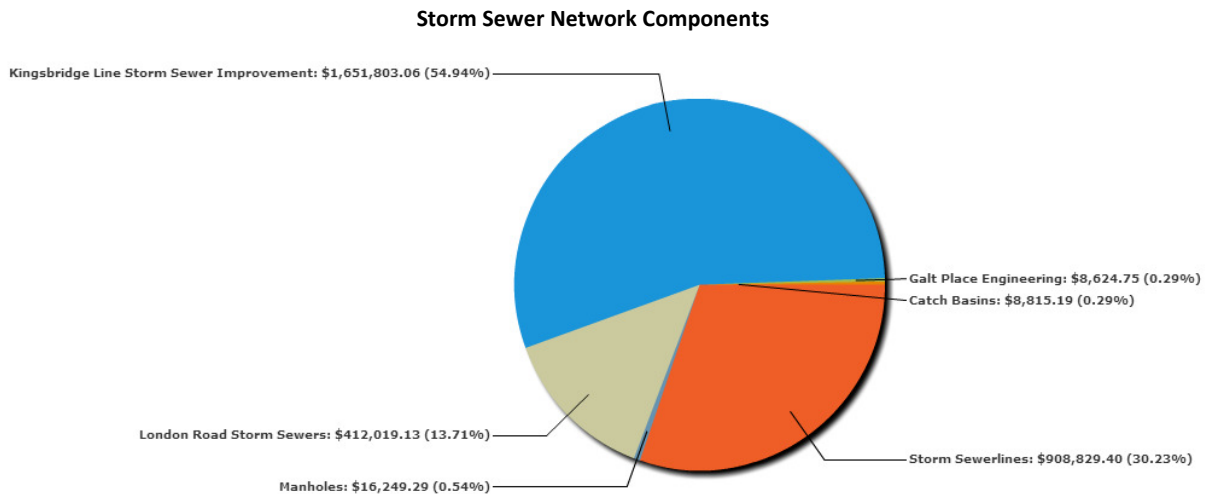

3.6.3 What condition is it in?

Nearly 100% of the storm sewer network, mains and appurtenances, are in fair to excellent condition. As such, the municipality received a Condition vs. Performance rating of 'B+'.

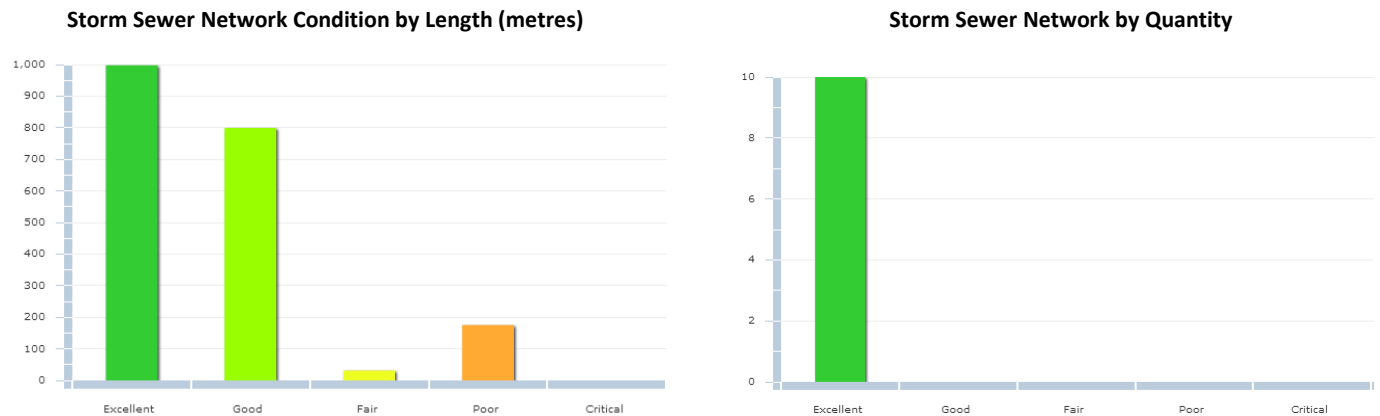

3.6.4 What do we need to do to it?

There are generally four distinct phases in an assets life cycle. These are presented at a high level for the storm sewer network below. Further detail is provided in the "Asset Management Strategy" section of this AMP.

Addressing Asset Needs		
Phase	Lifecycle Activity	Asset Age
Minor Maintenance	Activities such as inspections, monitoring, cleaning and flushing, zoom camera and CCTV inspections, etc.	1 st Qtr
Major Maintenance	Activities such as repairing manholes and replacing individual small sections of pipe.	2 nd Qtr
Rehabilitation	Rehabilitation events such as structural lining of pipes are extremely cost effective and provide an additional 75 plus years of life.	3 rd Qtr
Replacement	Pipe replacements	4 th Qtr


3.6.5 When do we need to do it?

For the purpose of this report "useful life" data for each asset class was obtained from the accounting data within the CityWide software database. This proposed useful life is used to determine replacement needs of individual assets, which are calculated in the system as part of the overall financial requirements.

Asset Useful Life in Years		
Asset Type	Asset Component	Useful Life in Years
Storm Sewer Network	Mains - Local (100mm)	100
	Mains - Local (300mm)	50
	Mains - Local (300mm)	75
	Mains - Local (300mm)	100
	Mains - Local (375mm)	75
	Mains - Local (450mm)	50
	Mains - Local (450mm)	75
	Mains - Local (450mm)	100
	Mains - Local (500mm)	75
	Mains - Local (525mm)	50
	Mains - Local (525mm)	100
	Mains - Local (600mm)	50
	Mains - Local (600mm)	75
	Mains - Local (675mm)	100
	Catch Basins	100
	Manholes	100
	Kingsbridge Line Storm Sewer Improvement	100
	London Road Storm Sewers	100
	Galt Place Engineering	75

As field condition information becomes available in time, the data should be loaded into the CityWide system in order to increasingly have a more accurate picture of current asset performance age and, therefore, future replacement requirements. The following table shows the current projection of storm sewer main replacements based on the age of the asset only.

Storm Sewer Main Replacement Profile

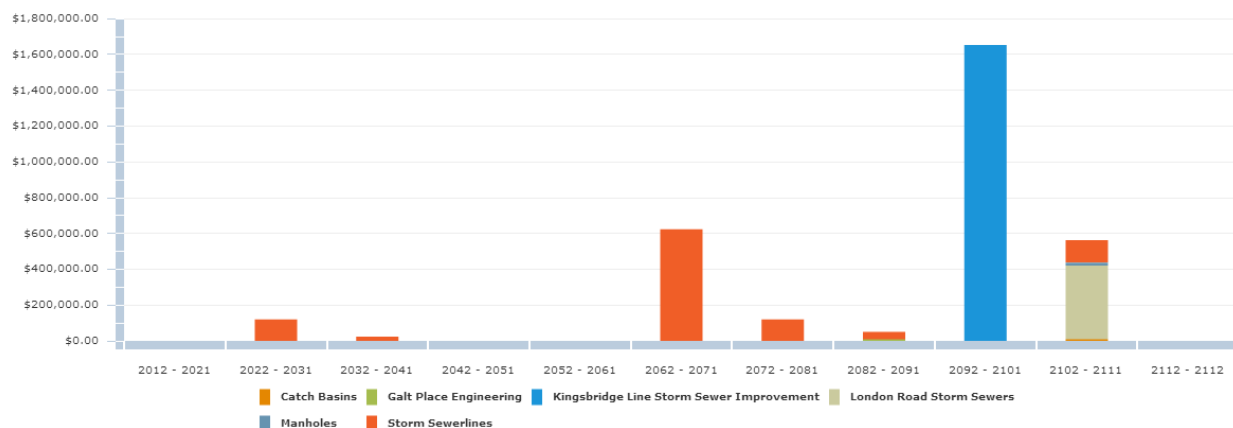


3.6.6 How much money do we need?

The analysis completed to determine capital revenue requirements was based on the following assumptions:

1. Replacement costs are based upon the unit costs identified within the "What is it worth?" section above.
2. The timing for individual storm sewer main replacement was defined by the replacement year as described in the "When do you need to do it?" section above.
3. All values are presented in 2012 dollars.
4. The analysis was run for a 100 year period to ensure all assets went through one iteration of replacement, therefore providing a sustainable projection.

3.6.7 How do we reach sustainability?

Based upon the above assumptions, the average annual revenue required to sustain Ashfield-Colborne-Wawanosh's storm sewer network is approximately **\$34,000**. Based on Ashfield-Colborne-Wawanosh's current annual funding of **\$17,000**, there is an annual **deficit of \$17,000**. As such, the municipality received a Funding vs. Need rating of 'D'.

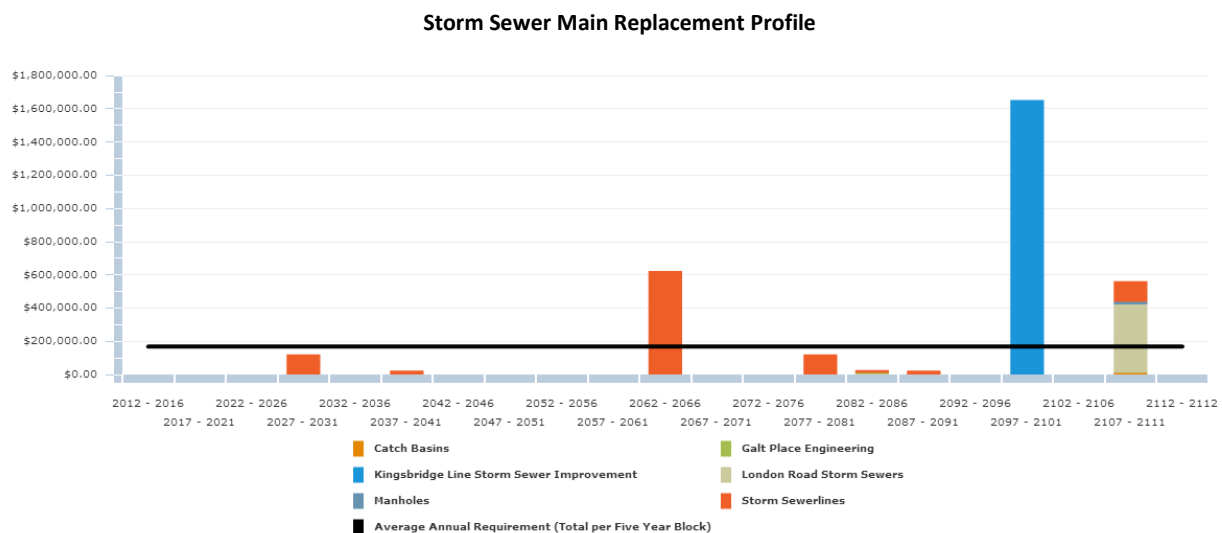

In conclusion, Ashfield-Colborne-Wawanosh's storm sewer network, based on age data only, is generally in very good condition with marginal to no immediate need.

3.6.8 Recommendations

The municipality received an overall rating of 'C' for its storm sewer network, calculated from the Condition vs. Performance and the Funding vs. Need ratings. Accordingly, we recommend the following:

1. A condition assessment program should be considered for the storm sewer network to gain a better understanding of current condition and performance as outlined further within the "Asset Management Strategy" section of this AMP.
2. Once the above study is complete or underway, the condition data should be loaded into the CityWide software and an updated "current state of the infrastructure" analysis should be generated.
3. An appropriate % of asset replacement value should be used for operations and maintenance activities on an annual basis. This should be determined through a detailed analysis of O & M activities and be added to future AMP reporting.
4. The Infrastructure Report Card should be updated on an annual basis.

4.0 Infrastructure Report Card

<div> <div>CUMULATIVE GPA</div> <div>C</div> <div> <h3>Infrastructure Report Card</h3> <p>The Township of Ashfield-Colborne-Wawanosh</p> </div> </div>				
<ol style="list-style-type: none"> Each asset category was rated on two key, equally weighted (50/50) dimensions: Condition vs. Performance, and Funding vs. Need. See the "What condition is it in?" section for details on the grade of each asset category on the Condition vs. Performance dimension. See the "How do we reach sustainability?" section for details on the grade of each asset category on the Funding vs. Need dimension. The 'Overall Rating' below is the average of the two ratings. 				
Asset category	Condition vs. Performance	Need vs. Funding	Overall grade	Comments
Road Network	C	F	D	While 60% of the road network is in fair to excellent condition, the remaining 40% is in poor to critical condition. The average annual revenue required to sustain Ashfield-Colborne-Wawanosh's paved road network is approximately \$1,468,000 . Based on Ashfield-Colborne-Wawanosh's current annual funding of \$627,000 , there is an annual deficit of \$841,000 .
Bridges & Culverts	D	D	D	Based on area, more than 70% of the municipality's bridges & culverts are in poor to critical condition. Further, based on quantity, an additional 50% are in poor to critical condition. The average annual revenue required to sustain Ashfield's bridges & culverts is \$358,000 . Based on Ashfield's current annual funding of \$191,000 , there is an annual deficit of \$167,000 .
Water Network	B	A	B+	The vast majority, 82%, of the municipality's facilities assets, and 100% of water mains, are in fair to excellent condition. The average annual revenue required to sustain Ashfield-Colborne-Wawanosh's water network is approximately \$129,000 . Based on Ashfield-Colborne-Wawanosh's current annual funding of \$129,000 , the asset class is fully-funded .
Storm Sewer Network	B+	D	C	Nearly 100% of the storm sewer network, mains and appurtenances, are in fair to excellent condition. The average annual revenue required to sustain Ashfield-Colborne-Wawanosh's storm sewer network is approximately \$34,000 . Based on Ashfield-Colborne-Wawanosh's current annual funding of \$17,000 , there is an annual deficit of \$17,000 .

5.0 Desired Levels of Service

Desired levels of service are high level indicators, comprising many factors, as listed below that establish defined quality thresholds at which municipal services should be supplied to the community. They support the organization's strategic goals and are based on customer expectations, statutory requirements, standards, and the financial capacity of a municipality to deliver those levels of service.

Levels of Service are used:

- to inform customers of the proposed type and level of service to be offered;
- to identify the costs and benefits of the services offered;
- to assess suitability, affordability and equity of the services offered;
- as a measure of the effectiveness of the asset management plan
- as a focus for the AM strategies developed to deliver the required level of service

In order for a municipality to establish a desired level of service, it will be important to review the key factors involved in the delivery of that service, and the interactions between those factors. In addition, it will be important to establish some key performance metrics and track them over an annual cycle to gain a better understanding of the current level of service supplied.

Within this first Asset Management Plan, key factors affecting level of service will be outlined below and some key performance indicators for each asset type will be outlined for further review. This will provide a framework and starting point from which the municipality can determine future desired levels of service for each infrastructure class.

5.1 Key factors that influence a level of service:

- Strategic and Corporate Goals
- Legislative Requirements
- Expected Asset Performance
- Community Expectations
- Availability of Finances

5.1.1 Strategic and Corporate Goals

Infrastructure levels of service can be influenced by strategic and corporate goals. Strategic plans spell out where an organization wants to go, how it's going to get there, and helps decide how and where to allocate resources, ensuring alignment to the strategic priorities and objectives . It will help identify priorities and guide how municipal tax dollars and revenues are spent into the future. The level of importance that a community's vision is dependent upon infrastructure, will ultimately affect the levels of service provided or those levels that it ultimately aspires to deliver.

5.1.2 Legislative Requirements

Infrastructure levels of service are directly influenced by many legislative and regulatory requirements. For instance, the Safe Drinking Water Act, the Minimum Maintenance Standards for municipal highways, building codes, and the Accessibility for Ontarians with Disabilities Act are all legislative requirements that prevent levels of service from declining below a certain standard.

5.1.3 Expected Asset Performance

A level of service will be affected by current asset condition, and performance and limitations in regards to safety, capacity, and the ability to meet regulatory and environmental requirements. In addition, the design life of the asset, the maintenance items required, the rehabilitation or replacement schedule of the asset, and the total costs, are all critical factors that will affect the level of service that can be provided.

5.1.4 Community Expectations

Levels of services are directly related to the expectations that the general public has from the infrastructure. For example, the public will have a qualitative opinion on what an acceptable road looks like, and a quantitative one on how long it should take to travel between two locations. Infrastructure costs are projected to increase dramatically in the future, therefore it is essential that the public is not only

consulted, but also be educated, and ultimately make choices with respect to the service levels that they wish to pay for.

5.1.5 Availability of Finances

Availability of finances will ultimately control all aspects of a desired level of service. Ideally, these funds must be sufficient to achieve corporate goals, meet legislative requirements, address an asset's life cycle needs, and meet community expectations. Levels of service will be dictated by availability of funds or elected officials' ability to increase funds, or the community's willingness to pay.


5.2 Key Performance Indicators

Performance measures or key performance indicators (KPIs) that track levels of service should be specific, measurable, achievable, relevant, and timebound (SMART). Many good performance measures can be established and tracked through the CityWide suite of software products. In this way, through automation, results can be reviewed on an annual basis and adjustments can be made to the overall asset management plan, including the desired level of service targets.

In establishing measures, a good rule of thumb to remember is that maintenance activities ensure the performance of an asset and prevent premature aging, whereas rehab activities extend the life of an asset. Replacement activities, by definition, renew the life of an asset. In addition, these activities are constrained by resource availability (in particular, finances) and strategic plan objectives. Therefore, performance measures should not just be established for operating and maintenance activities, but also for the strategic, financial, and tactical levels of the asset management program. This will assist all levels of program delivery to review their performance as part of the overall level of service provided.

This is a very similar approach to the "balanced score card" methodology, in which financial and non-financial measures are established and reviewed to determine whether current performance meets expectations. The "balanced score card", by design, links day to day operations activities to tactical and strategic priorities in order to achieve an overall goal, or in this case, a desired level of service.

The structure of accountability and level of indicator with this type of process is represented in the following table, modified from the InfraGuide's best practice document, "Developing Indicators and Benchmarks" published in April 2003.

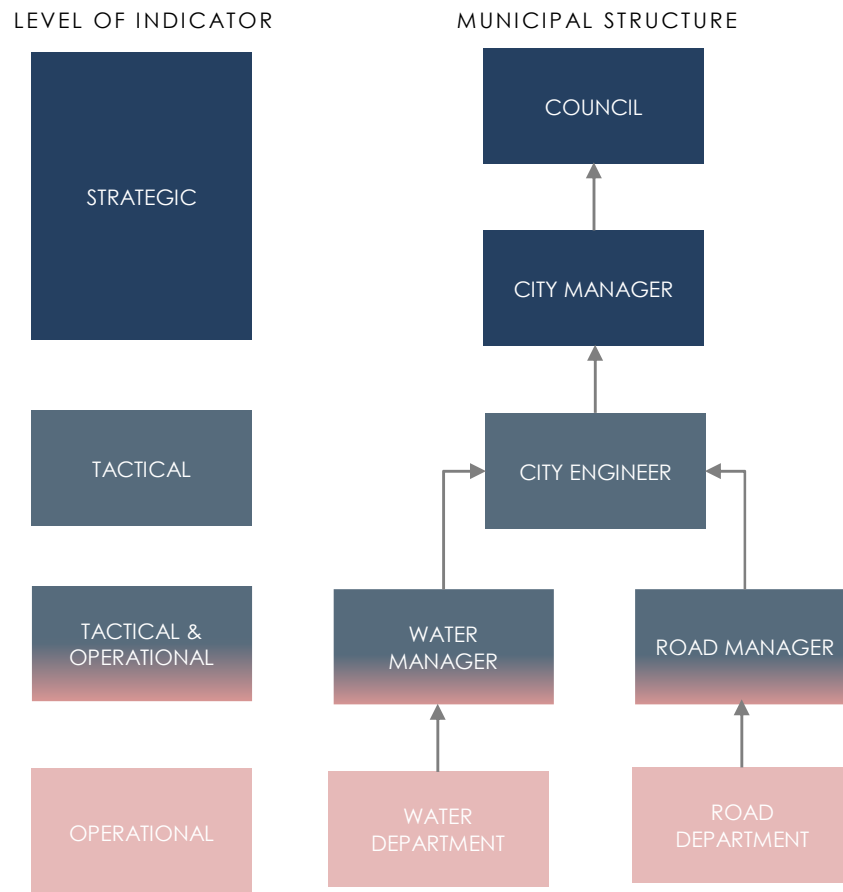

As a note, a caution should be raised over developing too many performance indicators that may result in data overload and lack of clarity. It is better to develop a select few that focus in on the targets of the asset management plan.

Outlined below for each infrastructure class is a suggested service description, suggested service scope, and suggested performance indicators. These should be reviewed and updated in each iteration of the AMP.

5.3 Transportation Services

5.3.1 Service Description

The township's transportation network comprises approximately 436 centreline km of road, 285 km are gravel and 151 km are paved, 17 bridges and a number of large culverts and sidewalks.

Together, the above infrastructure enables the township to deliver transportation and pedestrian facility services and give people a range of options for moving about in a safe and efficient manner.

5.3.2 Scope of Services

- **Movement** – providing for the movement of people and goods.
- **Access** – providing access to residential, commercial, and industrial properties and other community amenities.
- **Recreation** –providing for recreational use, such as walking, cycling, or special events such as parades.

5.3.3 Performance Indicators (reported annually)

Performance Indicators (reported annually)	
Strategic Indicators	<ul style="list-style-type: none"> ■ percentage of total reinvestment compared to asset replacement value ■ completion of strategic plan objectives (related to transportation)
Financial Indicators	<ul style="list-style-type: none"> ■ annual revenues compared to annual expenditures ■ annual replacement value depreciation compared to annual expenditures ■ total cost of borrowing compared to total cost of service ■ revenue required to maintain annual network growth
Tactical Indicators	<ul style="list-style-type: none"> ■ percentage of road network rehabilitated / reconstructed ■ value of bridge / large culvert structures rehabilitated or reconstructed ■ overall road condition index as a percentage of desired condition index ■ overall bridge condition index as a percentage of desired condition index ■ annual adjustment in condition indexes ■ annual percentage of network growth ■ percent of paved road lane km where the condition is rated Poor or Critical ■ number of bridge / large culvert structures where the condition is rated Poor or Critical ■ percentage of road network replacement value spent on operations and maintenance ■ percentage of bridge / large culvert structures replacement value spent on operations and maintenance
Operational Indicators	<ul style="list-style-type: none"> ■ percentage of road network inspected within last 5 years ■ percentage of bridge / large culvert structures inspected within last two years ■ operating costs for paved roads per lane km ■ operating costs for gravel roads per lane km ■ operating costs for bridge / large culvert structures per square metre ■ number of customer requests received annually ■ percentage of customer requests responded to within 24 hours

5.4 Water / Sanitary / Storm Networks

5.4.1 Service Description

The township's water distribution network comprises 15km of water main, and water facilities. The storm network comprises 2km of storm main.

Together, the above infrastructure enables the township to deliver a potable water distribution service, and a storm water collection service to the residents of the township.

5.4.2 Scope of services

- The provision of clean safe drinking water through a distribution network of water mains and pumps.
- The removal of storm water through a collection network of storm sewer mains, and catch basins

5.4.3 Performance Indicators (reported annually)

Performance Indicators (reported annually)	
Strategic Indicators	<ul style="list-style-type: none"> ■ Percentage of total reinvestment compared to asset replacement value ■ Completion of strategic plan objectives (related water / storm)
Financial Indicators	<ul style="list-style-type: none"> ■ Annual revenues compared to annual expenditures ■ Annual replacement value depreciation compared to annual expenditures ■ Total cost of borrowing compared to total cost of service ■ Revenue required to maintain annual network growth ■ Lost revenue from system outages
Tactical Indicators	<ul style="list-style-type: none"> ■ Percentage of water / storm network rehabilitated / reconstructed ■ Overall water / storm network condition index as a percentage of desired condition index ■ Annual adjustment in condition indexes ■ Annual percentage of growth in water / storm network ■ Percentage of mains where the condition is rated Poor or Critical for each network ■ Percentage of water / storm network replacement value spent on operations and maintenance
Operational Indicators	<ul style="list-style-type: none"> ■ Percentage of water / storm network inspected ■ Operating costs for storm water management (collection, treatment, and disposal) per kilometre of drainage system. ■ Operating costs for the distribution/ transmission of drinking water per kilometre of water distribution pipe. ■ Number of days when a boil water advisory issued by the medical officer of health, applicable to a municipal water supply, was in effect. ■ Number of water main breaks per 100 kilometres of water distribution pipe in a year. ■ Number of customer requests received annually per water / storm networks ■ Percentage of customer requests responded to within 24 hours per water / storm network

6.0 Asset Management Strategy

6.1 Objective

To outline and establish a set of planned actions, based on best practice, that will enable the assets to provide a desired and sustainable level of service, while managing risk, at the lowest life cycle cost.

The Asset Management Strategy will develop an implementation process that can be applied to the needs identification and prioritization of renewal, rehabilitation, and maintenance activities. This will assist in the production of a 10 year plan, including growth projections, to ensure the best overall health and performance of the municipality's infrastructure.

This section includes an overview of condition assessment techniques for each asset class; the life cycle interventions required, including interventions with the best ROI; and prioritization techniques, including risk, to determine which priority projects should move forward into the budget first.

6.2 Non-Infrastructure Solutions and Requirements

The Township should explore, as requested through the provincial requirements, which non-infrastructure solutions should be incorporated into the budgets for the road, water, sewer (sanitary and storm), and bridges & culverts programs. Non- Infrastructure solutions are such items as studies, policies, condition assessments, consultation exercises, etc., that could potentially extend the life of assets or lower total asset program costs in the future.

Typical solutions for a municipality include linking the asset management plan to the strategic plan, growth and demand management studies, infrastructure master plans, better integrated infrastructure and land use planning, public consultation on levels of service, and condition assessment programs. As part of future asset management plans, a review of these requirements should take place, and a portion of the capital budget should be dedicated for these items in each programs budget.

It is recommended, under this category of solutions, that the township implement holistic condition assessment programs for their road, water, sanitary, and storm sewer networks. This will lead to higher understanding of infrastructure needs, enhanced budget prioritization methodologies, and a clearer path of what is required to achieve sustainable infrastructure programs.

6.3 Condition Assessment Programs

The foundation of good asset management practice is based on having comprehensive and reliable information on the current condition of the infrastructure. Municipalities need to have a clear understanding regarding performance and condition of their assets, as all management decisions regarding future expenditures and field activities should be based on this knowledge. An incomplete understanding about an asset may lead to its premature failure or premature replacement.

Some benefits of holistic condition assessment programs within the overall asset management process are listed below:

- Understanding of overall network condition leads to better management practices
- Allows for the establishment of rehabilitation programs
- Prevents future failures and provides liability protection
- Potential reduction in operation / maintenance costs
- Accurate current asset valuation
- Allows for the establishment of risk assessment programs
- Establishes proactive repair schedules and preventive maintenance programs
- Avoids unnecessary expenditures
- Extends asset service life therefore improving level of service

- Improves financial transparency and accountability
- Enables accurate asset reporting which, in turn, enables better decision making

Condition assessment can involve different forms of analysis such as subjective opinion, mathematical models, or variations thereof, and can be completed through a very detailed or very cursory approach.

When establishing the condition assessment of an entire asset class, the cursory approach (metrics such as Good, Fair, Poor, Critical) is used. This will be a less expensive approach when applied to thousands of assets, yet will still provide up to date information, and will allow for detailed assessment or follow up inspections on those assets captured as Poor or Critical condition later.

The following section outlines condition assessment programs available for road, bridge, sewer, and water networks that would be useful for the township.

6.3.1 Pavement Network Inspections

Typical industry pavement inspections are performed by consulting firms using specialised assessment vehicles equipped with various electronic sensors and data capture equipment. The vehicles will drive the entire road network and typically collect two different types of inspection data – surface distress data and roughness data.

Surface distress data involves the collection of multiple industry standard surface distresses, which are captured either electronically, using sensing detection equipment mounted on the van, or visually, by the van's inspection crew. Examples of surface distresses are:

- **For asphalt surfaces**
alligator cracking; distortion; excessive crown; flushing; longitudinal cracking; map cracking; patching; edge cracking; potholes; ravelling; rippling; transverse cracking; wheel track rutting
- **For concrete surfaces**
coarse aggregate loss; corner 'C' and 'D' cracking; distortion; joint faulting; joint sealant loss; joint spalling; linear cracking; patching; polishing; potholes; ravelling; scaling; transverse cracking

Roughness data capture involves the measurement of the roughness of the road, measured by lasers that are mounted on the inspection van's bumper, calibrated to an international roughness index.

Most firms will deliver this data to the client in a database format complete with engineering algorithms and weighting factors to produce an overall condition index for each segment of roadway. This type of scoring database is ideal for upload into the CityWide software database, in order to tag each road with a present condition and then further life cycle analysis to determine what activity should be completed on which road, in what timeframe, and to calculate the cost for the work will be completed within the CityWide system.

The above process is an excellent way to capture road condition as the inspection trucks will provide detailed surface and roughness data for each road segment, and often include video or street imagery. A very rough industry estimate of cost would be about \$100 per centreline km of road, which means it would cost the township approximately \$15,100 for the 151 centreline km of paved road network.

Another option for a cursory level of condition assessment is for municipal road crews to perform simple windshield surveys as part of their regular patrol. Many municipalities have created data collection inspection forms to assist this process and to standardize what presence of defects would constitute a Good, Fair, Poor or Critical score. Lacking any other data for the complete road network, this can still be seen as a good method and will assist greatly with the overall management of the road network. The CityWide Works software has a road patrol component built in that could capture this type of inspection data during road patrols in the field, enabling later analysis of rehabilitation and replacement needs for budget development.

It is recommended that the township establish a pavement condition assessment program and that a portion of capital funding is dedicated to this.

6.3.2 Bridges & Culverts (greater than 3m) Inspections

Ontario municipalities are mandated by the Ministry of Transportation to inspect all structures that have a span of 3 metres or more, according to the OSIM (Ontario Structure Inspection Manual). At present, in the township, there are 17 bridges and a number of culverts structures that meet this criterion.

Structure inspections must be performed by, or under the guidance of, a structural engineer, must be performed on a biennial basis (once every two years), and include such information as structure type, number of spans, span lengths, other key attribute data, detailed photo images, and structure element by element inspection, rating and recommendations for repair, rehabilitation, and replacement.

The best approach to develop a 10 year needs list for the township's relatively small structure portfolio would be to have the structural engineer who performs the inspections to develop a maintenance requirements report, and rehabilitation and replacement requirements report as part of the overall assignment. In addition to refining the overall needs requirements, the structural engineer should identify those structures that will require more detailed investigations and non-destructive testing techniques. Examples of these investigations are:

- Detailed deck condition survey
- Non-destructive delamination survey of asphalt covered decks
- Substructure condition survey
- Detailed coating condition survey
- Underwater investigation
- Fatigue investigation
- Structure evaluation

Through the OSIM recommendations and additional detailed investigations, a 10 year needs list will be developed for the municipality's bridges.

The 10 year needs list developed could then be further prioritized using risk management techniques to better allocate resources. Also, the results of the OSIM inspection for each structure, whether BCI (bridge condition index) or general condition (Good, Fair, Poor, Critical) should be entered into the CityWide software to update results and analysis for the development of the budget.

6.3.3 Sewer Network Inspections (Sanitary & Storm)

The most popular and practical type of sanitary and storm sewer assessment is the use of Closed Circuit Television Video (CCTV). The process involves a small robotic crawler vehicle with a CCTV camera attached that is lowered down a maintenance hole into the sewer main to be inspected. The vehicle and camera then travels the length of the pipe providing a live video feed to a truck on the road above where a technician / inspector records defects and information regarding the pipe. A wide range of construction or deterioration problems can be captured including open/displaced joints, presence of roots, infiltration & inflow, cracking, fracturing, exfiltration, collapse, deformation of pipe and more. Therefore, sewer CCTV inspection is a very good tool for locating and evaluating structural defects and general condition of underground pipes.

Even though CCTV is an excellent option for inspection of sewers it is a fairly costly process and does take significant time to inspect a large volume of pipes.

Another option in the industry today is the use of Zoom Camera equipment. This is very similar to traditional CCTV, however, a crawler vehicle is not used but in it's a place a camera is lowered down a maintenance hole attached to a pole like piece of equipment. The camera is then rotated towards each connecting pipe and the operator above progressively zooms in to record all defects and information about each pipe. The downside to this technique is the further down the pipe the image is zoomed, the less clarity is available to accurately record defects and measurement. The upside is the process is far quicker and significantly less expensive and an assessment of the manhole can be provided as well. Also, it is important to note that 80% of pipe deficiencies generally occur within 20 metres of each manhole. The following is a list of advantages of utilizing Zoom Camera technology:

- A time and cost efficient way of examining sewer systems;
- Problem areas can be quickly targeted;
- Can be complemented by a conventional camera (CCTV), if required afterwards;
- In a normal environment, 20 to 30 manholes can be inspected in a single day, covering more than 1,500 meters of pipe;
- Contrary to the conventional camera approach, cleaning and upstream flow control is not required prior to inspection;
- Normally detects 80% of pipe deficiencies, as most deficiencies generally occur within 20 meters of manholes.

The following table is based on general industry costs for traditional CCTV inspection and Zoom Camera inspection; however, costs should be verified through local contractors. It is for illustrative purposes only but supplies a general idea of the cost to inspect Ashfield-Colborne-Wawanosh's entire storm network.

Sanitary and Sewer Inspection Cost Estimates				
Sewer Network	Assessment Activity	Cost	Metres of Main / # of Manholes	Total
Storm	Full CCTV	\$10 (per m)	2,000m	\$20,000
	Zoom	\$300 (Per mh)	25 manholes*	\$7,500

*Manhole numbers estimated using 1 per 80m of main

It can be seen from the above table that there is a significant cost savings achieved through the use of Zoom Camera technology. A good industry trend and best practice is to inspect the entire network using Zoom Camera technology and follow up on the Poor and Critical rated pipes with more detail using a full CCTV inspection. In this way, inspection expenditures are kept to a minimum, however, an accurate assessment on whether to rehabilitate or replace pipes will be provided for those with the greatest need.

It is recommended that the township establish a sewer condition assessment program and that a portion of capital funding is dedicated to this.

In addition to receiving a video and defect report of each pipe's CCTV or Zoom camera inspection, many companies can now provide a database of the inspection results, complete with scoring matrixes that provide an overall general condition score for each pipe segment that has been assessed. Typically pipes are scored from 1 – 5, with 1 being a relatively new pipe and 5 being a pipe at the end of its design life. This type of scoring database is ideal for upload into the CityWide software database, in order to tag each pipe with a present condition and then further life cycle analysis to determine what activity should be done to which pipe, in what timeframe, and to calculate the cost for the work will be completed by the CityWide system.

6.3.4 Water network inspections

Unlike sewer mains, it is very difficult to inspect water mains from the inside due to the high pressure flow of water constantly underway within the water network. Physical inspections require a disruption of service to residents, can be an expensive exercise, and are time consuming to set up. It is recommended practice that physical inspection of water mains typically only occurs for high risk, large transmission mains within the system, and only when there is a requirement. There are a number of high tech inspection techniques in the industry for large diameter pipes but these should be researched first for applicability as they are quite expensive. Examples are:

- Remote eddy field current (RFEC)
- Ultrasonic and acoustic techniques
- Impact echo (IE)
- Georadar

For the majority of pipes within the distribution network gathering key information in regards to the main and its environment can supply the best method to determine a general condition. Key data that could be used, along with weighting factors, to determine an overall condition score are listed below.

- Age
- Material Type
- Breaks
- Hydrant Flow Inspections

■ Soil Condition

Understanding the age of the pipe will determine useful life remaining, however, water mains fail for many other reasons than just age. The pipe material is important to know as different pipe types have different design lives and different deterioration profiles. Keeping a water main break history is one of the best analysis tools to predict future pipe failures and to assist with programming rehabilitation and replacement schedules. Also, most municipalities perform hydrant flow tests for fire flow prevention purposes. The readings from these tests can also help determine condition of the associated water main. If a hydrant has a relatively poor flow condition it could be indicative of a high degree of encrustation within the attached water main, which could then be flagged as a candidate for cleaning or possibly lining. Finally, soil condition is important to understand as certain soil types can be very aggressive at causing deterioration on certain pipe types.

It is recommended that the township develop a rating system for the mains within the distribution network based on the availability of key data, and that funds are budgeted for this development.

Also, it is recommended that the township utilize the CityWide Works application to track water main break work orders and hydrant flow inspection readings as a starting point to develop a future scoring database for each water main.


6.4 AM Strategy – Life Cycle Analysis Framework

An industry review was conducted to determine which life cycle activities can be applied at the appropriate time in an asset's life, to provide the greatest additional life at the lowest cost. In the asset management industry, this is simply put as doing the right thing to the right asset at the right time. If these techniques are applied across entire asset networks or port folios (e.g., the entire road network), the township could gain the best overall asset condition while expending the lowest total cost for those programs.

6.4.1 Paved Roads

The following analysis has been conducted at a fairly high level, using industry standard activities and costs for paved roads. With future updates of this Asset Management Strategy, the township may wish to run the same analysis with a detailed review of Township activities used for roads and the associated local costs for those work activities. All of this information can be input into the CityWide software suite in order to perform updated financial analysis as more detailed information becomes available.

The following diagram depicts a general deterioration profile of a road with a 30 year life.

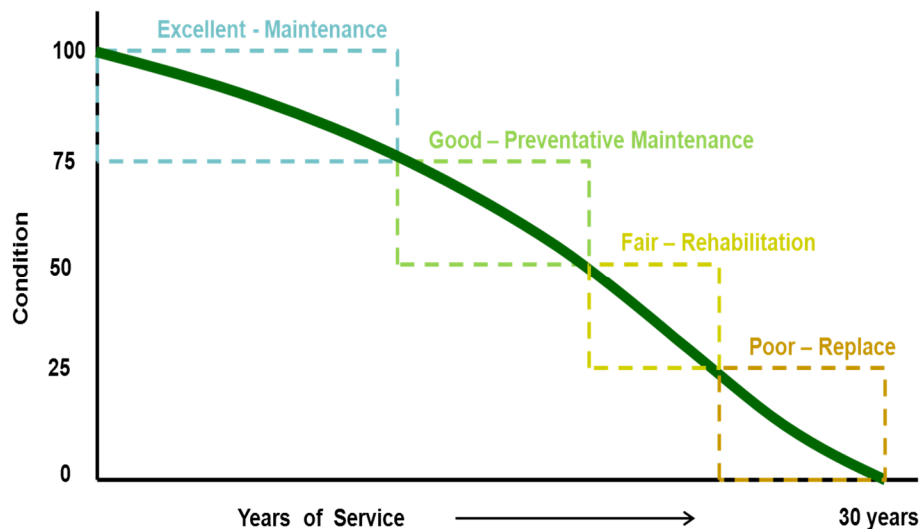

As shown above, during the road's life cycle there are various windows available for work activity that will maintain or extend the life of the asset. These windows are: maintenance; preventative maintenance; rehabilitation; and replacement or reconstruction.

The windows or thresholds for when certain work activities should be applied to also coincide approximately with the condition state of the asset as shown below:

Asset Condition and Related Work Activity: Paved Roads		
Condition	Condition Range	Work Activity
Excellent condition (Maintenance only phase)	100-76	■ maintenance only
Good Condition (Preventative maintenance phase)	75 - 51	■ crack sealing ■ emulsions
Fair Condition (Rehabilitation phase)	50 -26	■ resurface - mill & pave ■ resurface - asphalt overlay ■ single & double surface treatment (for rural roads)
Poor Condition (Reconstruction phase)	25 - 1	■ reconstruct - pulverize and pave ■ reconstruct - full surface and base reconstruction
Critical Condition (Reconstruction phase)	0	■ Critical includes assets beyond their useful lives which make up the backlog. They require the same interventions as the "Poor" category above.

With future updates of this Asset Management Strategy the township may wish to review the above condition ranges and thresholds for when certain types of work activity occur, and adjust to better suit the township's work program. Also note: when adjusting these thresholds, it actually adjusts the level of service provided and ultimately changes the amount of money required. These threshold and condition ranges can be easily updated with the CityWide software suite and an updated financial analysis can be calculated. These adjustments will be an important component of future Asset Management Plans, as the Province requires each municipality to present various management options within the financing plan.

The table below outlines the costs for various road activities, the added life obtained for each, the condition range at which they should be applied, and the cost of 1 year added life for each (cost of activity / added life) in order to present an apples to apples comparison.

Road Lifecycle Activity Options				
Treatment	Average Unit Cost (per sq. m)	Added Life (Years)	Condition Range	Cost Of Activity/Added Life
Urban Reconstruction	\$205	30	25 - 0	\$6.83
Urban Resurfacing	\$84	15	50 - 26	\$5.60
Rural Reconstruction	\$135	30	25 - 0	\$4.50
Rural Resurfacing	\$40	15	50 - 26	\$2.67
Double Surface Treatment	\$25	10	50 - 26	\$2.50
Routing & Crack Sealing (P.M)	\$2	3	75 - 51	\$0.67

As can be seen in the table above, preventative maintenance activities such as routing and crack sealing have the lowest associated cost (per sq. m) in order to obtain one year of added life. Of course, preventative maintenance activities can only be applied to a road at a relatively early point in the life cycle. It is recommended that the township engage in an active preventative maintenance program for all paved roads and that a portion of the maintenance budget is allocated to this.

Also, rehabilitation activities, such as urban and rural resurfacing or double surface treatments (tar and chip) for rural roads have a lower cost to obtain each year of added life than full reconstruction activities. It is recommended, if not in place already, that the municipality engages in an active rehabilitation program for urban and rural paved roads and that a portion of the capital budget is dedicated to this.

Of course, in order to implement the above programs it will be important to also establish a general condition score for each road segment, established through standard condition assessment protocols as previously described.

It is important to note that a "worst first" budget approach, whereby no life cycle activities other than reconstruction at the end of a roads life are applied, will result in the most costly method of managing a road network overall.

6.4.2 Gravel Roads

As reported in the State of the Infrastructure section, approximately 65% of Ashfield-Colborne-Wawanosh's road network comprises gravel roads. The life cycle activities required for these roads are quite different from paved roads. Gravel roads require a cycle of perpetual maintenance, including general re-grading, reshaping of the crown and cross section, gravel spot and section replacement, dust abatement and ditch clearing and cleaning.

Gravel roads can require frequent maintenance, especially after wet periods and when accommodating increased traffic. Wheel motion shoves material to the outside (as well as in-between travelled lanes), leading to rutting, reduced water-runoff, and eventual road destruction if unchecked. This deterioration process is prevented if interrupted early enough, simple re-grading is sufficient, with material being pushed back into the proper profile.

As a high proportion of gravel roads can have a significant impact on the maintenance budget, it is recommended that with further updates of this asset management plan the township study the traffic volumes and maintenance requirements in more detail for its gravel road network.

Similar studies elsewhere have found converting certain roadways to paved roads can be very cost beneficial especially if frequent maintenance is required due to higher traffic volumes. Roads within the gravel network should be ranked and rated using the following criteria:


- Usage - traffic volumes and type of traffic
- Functional importance of the roadway
- Known safety issues
- Frequency of maintenance and overall expenditures required.

Through the above type of analysis, a program could be introduced to convert certain gravel roadways into paved roads, reducing overall costs, and be brought forward into the long range budget.

6.4.3 Sanitary and Storm Sewers

The following analysis has been conducted at a fairly high level, using industry standard activities and costs for sanitary and storm sewer rehabilitation and replacement. With future updates of this asset management strategy, the township may wish to run the same analysis with a detailed review of Township activities used for sewer mains and the associated local costs for those work activities. All of this information can be input into the CityWide software suite in order to perform updated financial analysis as more detailed information becomes available.

The following diagram depicts a general deterioration profile of a sewer main with a 100 year life.

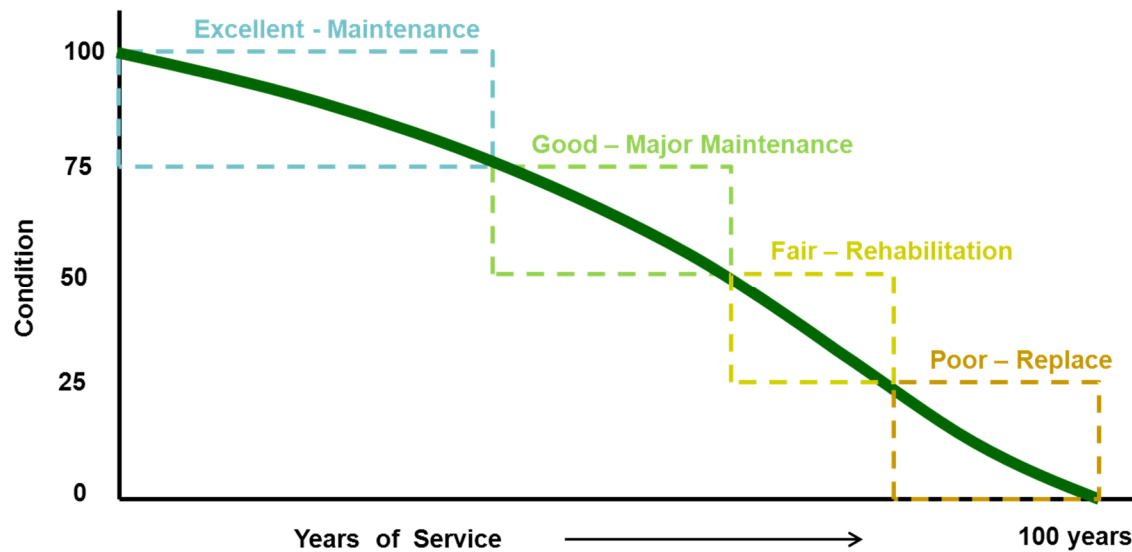

As shown above, during the sewer main's life cycle there are various windows available for work activity that will maintain or extend the life of the asset. These windows are: maintenance; major maintenance; rehabilitation; and replacement or reconstruction.

The windows or thresholds for when certain work activities should be applied also coincide approximately with the condition state of the asset as shown below:

Asset Condition and Related Work Activity: Sewer Main		
Condition	Condition Range	Work Activity
Excellent condition (Maintenance only phase)	100-76	■ maintenance only (cleaning & flushing etc.)
Good Condition (Preventative maintenance phase)	75 - 51	■ mahhole repairs ■ small pipe section repairs
Fair Condition (Rehabilitation phase)	50 -26	■ structural relining
Poor Condition (Reconstruction phase)	25 - 1	■ pipe replacement ■ reconstruct - full surface and base reconstruction
Critical Condition (Reconstruction phase)	0	■ critical includes assets beyond their useful lives which make up the backlog. They require the same interventions as the "Poor" category above.

With future updates of this Asset Management Strategy the township may wish to review the above condition ranges and thresholds for when certain types of work activity occur, and adjust to better suit the townships work program. Also note: when adjusting these thresholds, it actually adjusts the level of service provided and ultimately changes the amount of money required. These threshold and condition ranges can be easily updated with the CityWide software suite and an updated financial analysis can be

calculated. These adjustments will be an important component of future Asset Management Plans, as the province requires each municipality to present various management options within the financing plan.

The table below outlines the costs, by pipe diameter, for various sewer main rehabilitation (lining) and replacement activities. The columns display the added life obtained for each activity, the condition range at which they should be applied, and the cost of 1 year added life for each (cost of activity / added life) in order to present an apples to apples comparison.

Sewer Main Lifecycle Activity Options				
Category	Cost (per m)	Added Life	Condition Range	1 year Added Life Cost (Cost / Added Life)
Structural Rehab (m)				
0 - 325mm	\$174.69	75	50 - 75	\$2.33
325 - 625mm	\$283.92	75	50 - 75	\$3.79
625 - 925mm	\$1,857.11	75	50 - 75	\$24.76
> 925mm	\$1,771.34	75	50 - 75	\$23.62
Replacement (m)				
0 - 325mm	\$475.00	100	76 - 100	\$4.75
325 - 625mm	\$725.00	100	76 - 100	\$7.25
625 - 925mm	\$900.00	100	76 - 100	\$9.00
> 925mm	\$1,475.00	100	76 - 100	\$14.75

As can be seen in the above table, structural rehabilitation or lining of sewer mains is an extremely cost effective industry activity and solution for pipes with a diameter less than 625mm. The unit cost of lining is approximately one third of replacement and the cost to obtain one year of added life is half the cost. For Ashfield-Colborne-Wawanosh, this diameter range would account for 95% of storm mains. Structural lining has been proven through industry testing to have a design life (useful life) of 75 years, however, it is believed that liners will probably obtain 100 years of life (the same as a new pipe).

For sewer mains with diameters greater than 625mm specialized liners are required and therefore the costs are no longer effective. It should be noted, however, that the industry is continually expanding its technology in this area and therefore future costs should be further reviewed for change and possible price reductions.

It is recommended, if not in place already, that the township engage in an active structural lining program for sanitary and storm sewer mains and that a portion of the capital budget be dedicated to this.

In order to implement the above, it will be important to also establish a condition assessment program to establish a condition score for each sewer main within the sanitary and storm collection networks, and therefore identify which pipes are good candidates for structural lining.


6.4.4 Bridges & Culverts (greater than 3m span)

The best approach to develop a 10 year needs list for the township's relatively small bridge structure portfolio would be to have the structural engineer who performs the inspections to develop a maintenance requirements report, a rehabilitation and replacement requirements report and identify additional detailed inspections as required. This approach is described in more detail within the "Bridge & Culvert (greater than 3m) Inspections" section above.

6.4.5 Water Network

As with roads and sewers above, the following analysis has been conducted at a fairly high level, using industry standard activities and costs for water main rehabilitation and replacement.

The following diagram depicts a general deterioration profile of a water main with an 80 year life.

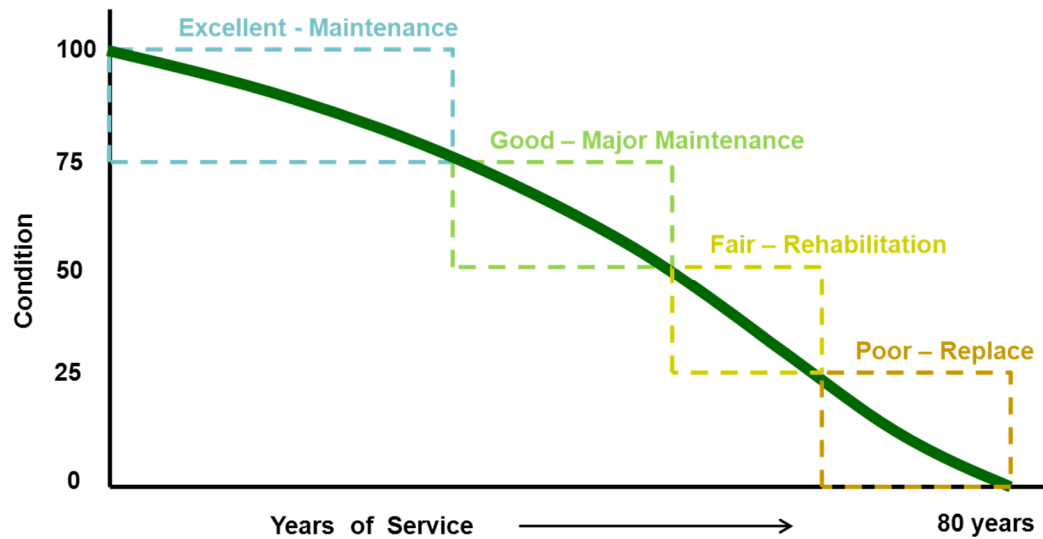

As shown above, during the water main's life cycle there are various windows available for work activity that will maintain or extend the life of the asset. These windows are: maintenance; major maintenance; rehabilitation; and replacement or reconstruction.

The windows or thresholds for when certain work activities should be applied also coincide approximately with the condition state of the asset as shown below:

Asset Condition and Related Work Activity: Water Main		
Condition	Condition Range	Work Activity
Excellent condition (Maintenance only phase)	100-76	■ maintenance only (cleaning & flushing etc.)
Good Condition (Preventative maintenance phase)	75 - 51	■ water main break repairs ■ small pipe section repairs
Fair Condition (Rehabilitation phase)	50 -26	■ structural water main relining
Poor Condition (Reconstruction phase)	25 - 1	■ pipe replacement
Critical Condition (Reconstruction phase)	0	■ critical includes assets beyond their useful lives which make up the backlog. They require the same interventions as the "Poor" category above.

Water main Lifecycle Activity Option				
Category	Cost	Added Life	Condition Range	Cost of Activity / Added Life
Structural Rehab (m)				
0.000 - 0.150m	\$209.70	50	50 - 75	\$4.19
0.150 - 0.300m	\$315.00	50	50 - 75	\$6.30
0.300 - 0.400m	\$630.00	50	50 - 75	\$12.60
0.400 - 0.700m	\$1,500.00	50	50 - 75	\$30.00
0.700 m - & +	\$2,000.00	50	50 - 75	\$40.00
Replacement (m)				
0.000 - 0.150m	\$233.00	80	76 - 100	\$2.91
0.150 - 0.300m	\$350.00	80	76 - 100	\$4.38
0.300 - 0.400m	\$700.00	80	76 - 100	\$8.75
0.400 - 0.700m	\$1,500.00	80	76 - 100	\$18.75
0.700 m - & +	\$2,000.00	80	76 - 100	\$25.00

Water rehab technologies still require some digging (known as low dig technologies, due to lack of access) and are actually more expensive on a life cycle basis. However, if the road above the water main is in good condition lining avoids the cost of road reconstruction still resulting in a cost effective solution.

It should be noted, that the industry is continually expanding its technology in this area and therefore future costs should be further reviewed for change and possible price reductions.

At this time, it is recommended that the township only utilize water main structural lining when the road above requires rehab or no work.

6.5 Growth and Demand

Typically a municipality will have specific plans associated with population growth. It is essential that the asset management strategy should address not only the existing infrastructure, as above, but must include the impact of projected growth on defined project schedules and funding requirements. Projects would include the funding of the construction of new infrastructure, and/or the expansion of existing infrastructure to meet new demands. The Township should enter these projects into the CityWide software in order to be included within the short and long term budgets as required.

6.6 Project Prioritization

The above techniques and processes when established for the road, water, sewer networks and bridges will supply a significant listing of potential projects. Typically the infrastructure needs will exceed available resources and therefore project prioritization parameters must be developed to ensure the right projects come forward into the short and long range budgets. An important method of project prioritization is to rank each project, or each piece of infrastructure, on the basis of how much risk it represents to the organization.

6.6.1 Risk Matrix and Scoring Methodology

Risk within the infrastructure industry is often defined as the probability (likelihood) of failure multiplied by the consequence of that failure.

$$\text{RISK} = \text{LIKELIHOOD OF FAILURE} \times \text{CONSEQUENCE OF FAILURE}$$

The likelihood of failure relates to the current condition state of each asset, whether they are in Excellent, Good, Fair, Poor or Critical condition, as this is a good indicator regarding their future risk of failure. The consequence of failure relates to the magnitude, or overall effect, that an asset's failure will cause. For instance, a small diameter water main break in a sub division may cause a few customers to have no water service for a few hours, whereby a large trunk water main break outside a hospital could have disastrous effects and would be a front page news item. The following table represents the scoring matrix for risk:

Consequence of Failure	High					
	5	1 Asset 100 m \$23,260.67	1 Asset 1 units \$1,044,172.20	1 Asset 619.02 m2 \$1,276,210.91	No Assets - N/A	No Assets - N/A
	4	14 Assets 12,590.8 m \$1,358,471.25	22 Assets 30,971 m \$3,121,490.34	25 Assets 12,508 m, units \$2,340,437.82	25 Assets 26,315.46 m, m2 \$4,580,769.07	65 Assets 53,723.6 m, m2 \$9,940,956.73
	3	4 Assets 302 m \$117,977.36	6 Assets 221 m, units \$1,178,183.04	8 Assets 689.75 m, units, m2 \$1,390,644.83	1 Asset 166.44 m2 \$327,125.52	4 Assets 569.49 units, m2 \$1,129,982.68
	2	43 Assets 6,331 m \$797,427.22	17 Assets 1,474.94 m, units, m2 \$1,400,049.82	5 Assets 664.78 m, m2 \$480,972.37	1 Asset 1 units \$131,892.77	6 Assets 294.28 m2, units, sq ft \$951,874.39
	1	12 Assets 3,041.6 m, units \$536,764.25	3 Assets 236 m \$90,684.23	4 Assets 1,152 m \$369,198.76	3 Assets 3 units \$127,305.92	3 Assets 3 units \$152,373.75
Low	1	2	3	4	5	High

All of the township's assets analyzed within this asset management plan have been given both a likelihood of failure score and a consequence of failure score within the CityWide software. The following risk scores have been developed at a high level for each asset class within the CityWide software system. It is recommended that the township undertake a detailed study to develop a more tailored suite of risk scores, particularly in regards to the consequence of failure, and that this be updated within the CityWide software with future updates to this Asset Management Plan.

The current scores that will determine budget prioritization currently within the system are as follows:

All assets:

The Likelihood of Failure score is based on the condition of the assets:

Likelihood of Failure: All Assets	
Asset condition	Likelihood of failure
Excellent condition	score of 1
Good condition	score of 2
Fair condition	score of 3
Poor condition	score of 4
Critical condition	score of 5

Bridges (based on valuation):

The consequence of failure score for this initial AMP is based upon the replacement value of the structure. The higher the value, probably the larger the structure and therefore probably the higher the consequential risk of failure:

Consequence of Failure: Bridges	
Replacement Value	Consequence of failure
Up to \$100k	score of 1
\$101-\$200k	score of 2
\$201-\$400k	score of 3
\$401-\$800k	score of 4
\$801k and above	score of 5

Roads (based on classification):

The consequence of failure score for this initial AMP is based upon the road classification as this will reflect traffic volumes and number of people affected.

Consequence of Failure: Roads	
Road Classification	Consequence of failure
Gravel	score of 1
Paved	score of 4

Water (based on diameter):

The consequence of failure score for this initial AMP is based upon pipe diameter as this will reflect potential service area affected.

Consequence of Failure: Water	
Pipe Diameter	Consequence of Failure
Up to 50mm	score of 1
51-100mm	score of 2
101-150mm	score of 3
151-200mm	score of 4
201mm and above	score of 5

Storm Sewer (based on diameter):

The consequence of failure score for this initial AMP is based upon pipe diameter as this will reflect potential upstream service area affected.


Consequence of Failure: Storm Sewer	
Replacement Value	Consequence of failure
Up to 150mm	score of 1
151-300mm	score of 2
301-350mm	score of 3
351-600mm	score of 4
601mm and above	score of 5

7.0 Financial Strategy

7.1 General overview of financial plan requirements

In order for an AMP to be effectively put into action, it must be integrated with financial planning and long-term budgeting. The development of a comprehensive financial plan will allow the Township of Ashfield-Colborne-Wawanosh to identify the financial resources required for sustainable asset management based on existing asset inventories, desired levels of service and projected growth requirements.

The following pyramid depicts the various cost elements and resulting funding levels that should be incorporated into AMP's that are based on best practices.

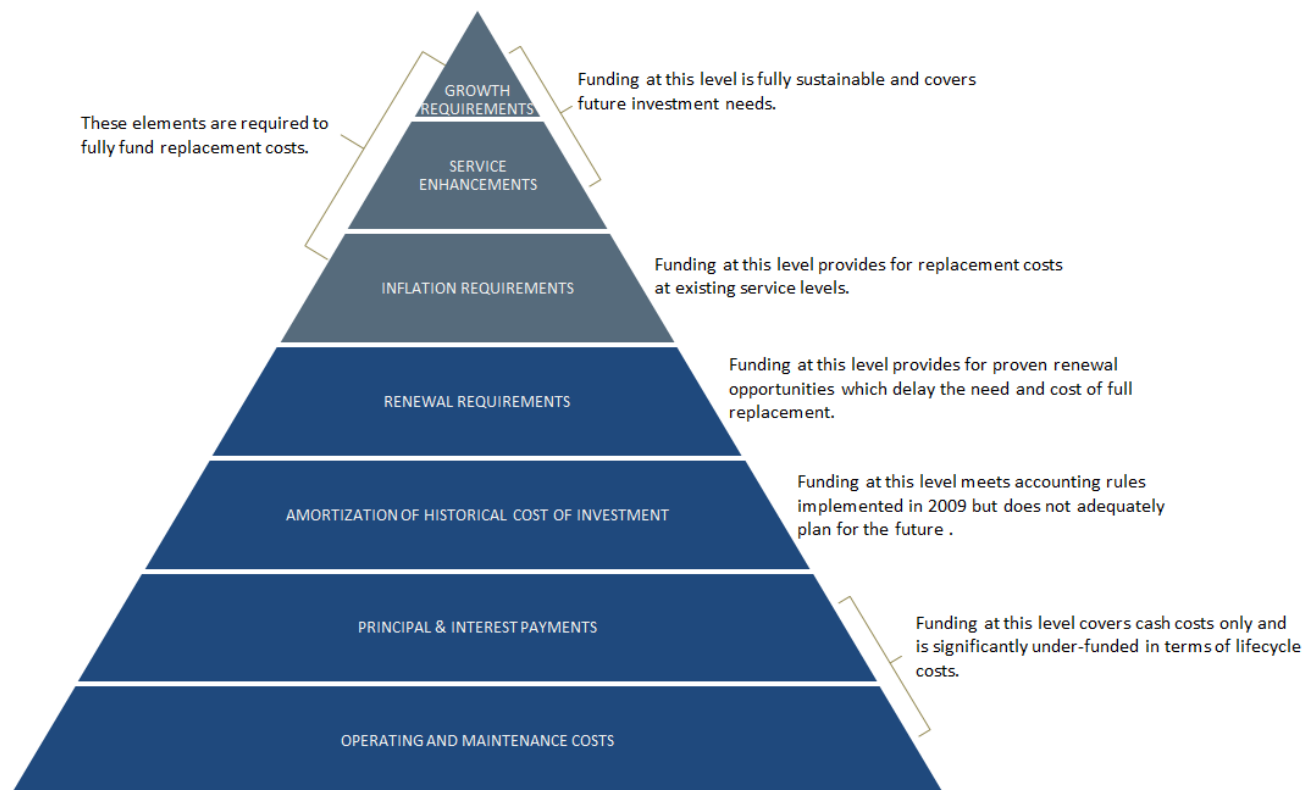

This report develops such a financial plan by presenting several scenarios for consideration and culminating with final recommendations. As outlined below, the scenarios presented model different combinations of the following components:

- a) the financial requirements (as documented in the SOTI section of this report) for:
 - existing assets
 - existing service levels
 - requirements of contemplated changes in service levels (none identified for this plan)
 - requirements of anticipated growth (none identified for this plan)
- b) use of traditional sources of municipal funds:
 - tax levies
 - user fees
 - reserves
 - debt (no additional debt required for this AMP)
 - development charges (not applicable)

- c) use of non-traditional sources of municipal funds:
 - reallocated budgets (not required for this AMP)
 - partnerships (not applicable)
 - procurement methods (no changes recommended)
- d) use of senior government funds:
 - gas tax
 - grants (not included in this plan due to Provincial requirements for firm commitments)

If the financial plan component of an AMP results in a funding shortfall, the Province requires the inclusion of a specific plan as to how the impact of the shortfall will be managed. In determining the legitimacy of a funding shortfall, the Province may evaluate a municipality's approach to the following:

- a) in order to reduce financial requirements, consideration has been given to revising service levels downward
- b) all asset management and financial strategies have been considered. For example:
 - if a zero debt policy is in place, is it warranted? If not, the use of debt should be considered.
 - do user fees reflect the cost of the applicable service? If not, increased user fees should be considered.

This AMP includes recommendations that avoid long-term funding deficits.

7.2 Financial information relating to Ashfield-Colborne-Wawanosh's AMP

7.2.1 Funding objective

We have been asked to develop scenarios that would enable the Township of Ashfield-Colborne-Wawanosh to achieve full funding within 5 to 10 years for the following assets:

- a) Tax funded assets - paved roads; bridges & culverts; storm sewers.
- b) Rate funded assets – water services.

Note: For the purposes of this AMP, we have excluded the category of gravel roads since gravel roads are a perpetual maintenance asset and end of life replacement calculations do not normally apply. If gravel roads are maintained properly they, in essence, could last forever.

For each scenario developed we have included strategies, where applicable, regarding the use of tax revenues, user fees and reserves.

7.3 Tax funded assets

7.3.1 Current funding position

Tables 1 and 2 outline, by asset category, the Township of Ashfield-Colborne-Wawanosh's average annual asset investment requirements, current funding positions and funding increases required to achieve full funding on assets funded by taxes.

Table 1. Summary of Infrastructure Requirements & Current Funding Available						
Asset Category	Average Annual Investment Required	2013 Annual Funding Available				Annual Deficit
		Taxes	Gas Tax	User Fees	Total	
Paved Roads	1,468,000	627,000	0	0	627,000	841,000
Bridges & Culverts	358,000	21,000	170,000	0	191,000	167,000
Storm	34,000	0	0	17,000	17,000	17,000
Total	1,860,000	648,000	170,000	17,000	835,000	1,025,000

7.3.2. Recommendations for full funding

The average annual investment requirement for paved roads and bridges/culverts is \$1,860,000. Annual revenue currently allocated to these assets is \$835,000 leaving an annual deficit of \$1,025,000. To put it another way, these infrastructure categories are currently funded at 45% of their long-term requirements.

Ashfield-Colborne-Wawanosh has annual tax revenues of \$2,881,000 in 2013. As illustrated in table 2, without consideration of any other source of revenue, full funding would require an increase in tax revenue of 35.6% over time.

Table 2. Overview of Revenue Requirements for Full Funding	
Asset Category	Tax Increase Required for Full Funding
Paved Roads	29.2%
Bridges & Culverts	5.8%
Storm Sewers	0.6%
Total	35.6%

Through table 3, we have expanded the above scenario to outline two options:

Table 3. Revenue Options for Full Funding		
	Tax Revenues	
	5 Years	10 Years
Annual tax increases required	7.1%	3.6%

We recommend the 10 year option in table 3. This involves full funding being achieved over 10 years by:

- a) increasing tax revenues by 3.6% each year for the next 10 years solely for the purpose of phasing in full funding to the three tax based asset categories covered by this AMP.
- b) allocating 100% of the federal gas tax revenue (currently \$170,000) to the bridges & culverts category.
- c) increasing existing and future infrastructure budgets by the applicable inflation index on an annual basis in addition to the deficit phase-in.

Notes:

1. As in the past, periodic senior government infrastructure funding will most likely be available during the phase-in period. By Provincial AMP rules, this funding cannot be incorporated into the AMP unless there are firm commitments in place.

Although this option achieves full funding on an annual basis in 10 years and provides financial sustainability over the period modeled (to 2050), the recommendations do require prioritizing capital projects to fit the resulting annual funding available. As of 2013, age based data shows a pent up investment demand of \$10,310,000 for paved roads, \$5,448,000 for bridges/culverts and \$0 for storm sewers. Prioritizing future projects will require the age based data to be replaced by condition based data. Although our recommendations include no further use of debt, the results of the condition based analysis may require otherwise.

7.4 Rate funded assets

7.4.1 Current funding position

Tables 4 and 5 outline, by asset category, the Township of Ashfield-Colborne-Wawanosh's average annual asset investment requirements, current funding positions and funding increases required to achieve full funding on assets funded by rates.

Table 4. Summary of Infrastructure Requirements & Current Funding Available						
Asset Category	Average Annual Investment Required	2013 Annual Funding Available				Annual Deficit
		Rates	Less: Allocated to Operations	Other	Total	
Sanitary Services	0	0	0	0	0	0
Water Services	129,000	261,000	-132,000	0	129,000	0
Total	129,000	261,000	-132,000	0	129,000	0

The average annual investment requirement for water services is \$129,000. Annual revenue currently allocated to these assets for capital purposes is \$129,000 leaving an annual deficit of \$0. To put it another way, this infrastructure category is currently funded at 100% of their long-term requirements.

In 2013, Ashfield-Colborne-Wawanosh has annual water revenues of \$261,000. As illustrated in table 5, no change is required since full funding has been achieved.

Table 5. Overview of Revenue Increases Required for Full Funding	
Asset Category	Rate Increase Required for Full Funding
Sanitary Services	n/a
Water Services	0.0%

Notes:

1. As in the past, periodic senior government infrastructure funding will most likely be available during the phase-in period. By Provincial AMP rules, this funding cannot be incorporated into an AMP unless there are firm commitments in place.
2. Any increase in rates required for operations would be in addition to the above recommendations.

Although the current position of water services has achieved full funding on an annual basis and provides financial sustainability over the period modeled (to 2050), Ashfield-Colborne-Wawanosh will be required to prioritize capital projects to fit the resulting annual funding available. As of 2013, age based data shows a pent up investment demand for water services of \$120,000. Prioritizing future projects will require the age based data to be replaced by condition based data. Although our recommendations include no further use of debt, the results of the condition based analysis may require otherwise.


7.5 Use of debt

For reference purposes, table 6 outlines the premium paid on a project if financed by debt. For example, a \$1M project financed at 3.0%¹ over 15 years would result in a 26% premium or \$260,000 of increased costs due to interest payments. For simplicity, the table does not take into account the time value of money or the effect of inflation on delayed projects.

Table 6. Total Interest Paid as a % of Project Costs						
Interest Rate	Number Of Years Financed					
	5	10	15	20	25	30
7.0%	22%	42%	65%	89%	115%	142%
6.5%	20%	39%	60%	82%	105%	130%
6.0%	19%	36%	54%	74%	96%	118%
5.5%	17%	33%	49%	67%	86%	106%
5.0%	15%	30%	45%	60%	77%	95%
4.5%	14%	26%	40%	54%	69%	84%
4.0%	12%	23%	35%	47%	60%	73%
3.5%	11%	20%	30%	41%	52%	63%
3.0%	9%	17%	26%	34%	44%	53%
2.5%	8%	14%	21%	28%	36%	43%
2.0%	6%	11%	17%	22%	28%	34%
1.5%	5%	8%	12%	16%	21%	25%
1.0%	3%	6%	8%	11%	14%	16%
0.5%	2%	3%	4%	5%	7%	8%
0.0%	0%	0%	0%	0%	0%	0%

It should be noted that current interest rates are near all-time lows. Sustainable funding models that include debt need to incorporate the risk of rising interest rates. The following graph shows where historical lending rates have been:

¹ Current municipal Infrastructure Ontario rates for 15 year money is 3.2%.

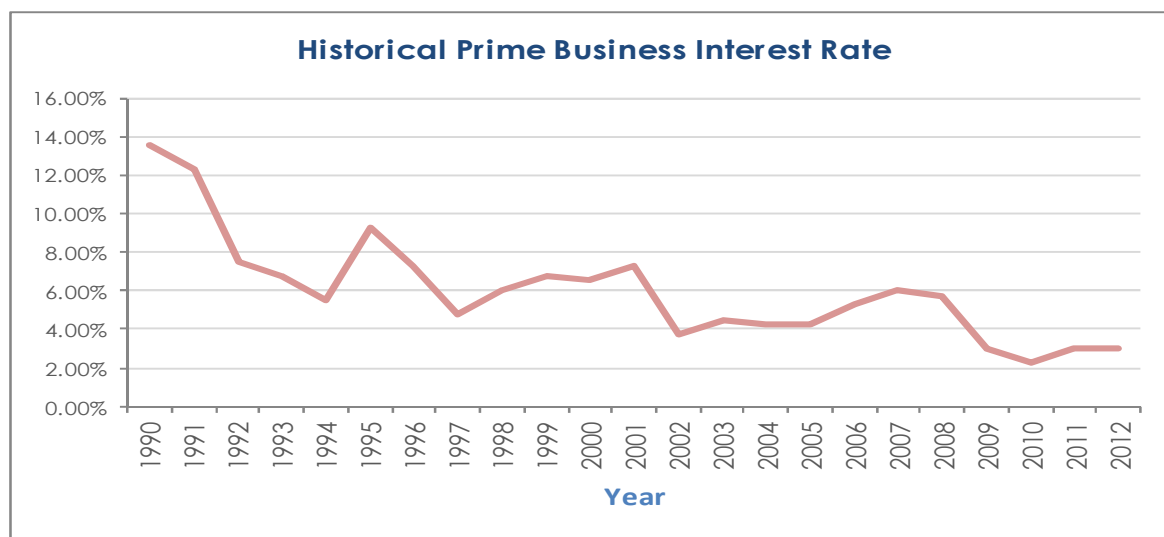

As illustrated in table 6, a change in 15 year rates from 3% to 6% would change the premium from 26% to 54%. Such a change would have a significant impact on a financial plan.

Tables 7 and 8 outline how the Township of Ashfield-Colborne-Wawanosh has historically used debt for investing in the asset categories as listed. There is currently no debt outstanding for the assets covered by this AMP. In terms of overall debt capacity, Ashfield-Colborne-Wawanosh currently no debt outstanding debt and no annual principal and interest payment commitments. Its provincially prescribed annual debt payment maximum is \$1,154,000.

Table 7. Overview of Use of Debt						
Asset Category	Current Debt Outstanding	Use Of Debt In Last Five Years				
		2009	2010	2011	2012	2013
Paved Roads	0	0	0	0	0	0
Bridges & Culverts	0	0	0	0	0	0
Storm Sewers	0	0	0	0	0	0
Sanitary Services	0	0	0	0	0	0
Water Services	0	0	0	0	0	0
Total for AMP Categories	0	0	0	0	0	0
Non AMP Debt	0	0	0	0	0	0
Overall Total	0	0	0	0	0	0

Table 8. Overview of Debt Costs					
Asset Category	Principal & Interest Payments In Next Five Years				
	2013	2014	2015	2016	2017
Paved Roads	0	0	0	0	0
Bridges & Culverts	0	0	0	0	0
Storm Sewers	0	0	0	0	0
Total Tax Funded	0	0	0	0	0
Sanitary Services	0	0	0	0	0
Water Services	0	0	0	0	0
Total Rate Funded	0	0	0	0	0
Total AMP Debt	0	0	0	0	0
Non AMP Debt	0	0	0	0	0
Overall Total	0	0	0	0	0

The Township of Ashfield-Colborne-Wawanosh has indicated that their long-term goal is to fully fund its infrastructure requirements without further use of debt. As illustrated in this plan, the revenue options available to Ashfield-Colborne-Wawanosh allow them to meet this goal. However, as explained in sections 7.3.2 and 7.4.2, the recommended condition rating analysis may require otherwise.

7.6 Use of reserves

7.6.1 Available reserves

Reserves play a critical role in long-term financial planning. The benefits of having reserves available for infrastructure planning include:

- the ability to stabilize tax rates when dealing with variable and sometimes uncontrollable factors
- financing one-time or short term investments
- accumulating the funding for significant future infrastructure investments
- managing the use of debt
- normalizing infrastructure funding requirements

By infrastructure category, table 9 outlines the details of the reserves currently available to the Township of Ashfield-Colborne-Wawanosh.

Table 9. Summary of Reserves Available	
Asset Category	Balance at December 31, 2012
Paved Roads	0
Bridges	81,000
Storm Sewers	0
Total Tax Funded	81,000
Water Services	125,000
Sanitary Services	0
Total Rate Funded	125,000

There is considerable debate in the municipal sector as to the appropriate level of reserves that a municipality should have on hand. There is no clear guideline that has gained wide acceptance. Factors that municipalities should take into account when determining their capital reserve requirements include:

- breadth of services provided
- age and condition of infrastructure
- use and level of debt
- economic conditions and outlook
- internal reserve and debt policies.

Due to the relatively low level of reserves for the asset categories covered by this AMP, the scenarios developed in this report do not draw on the above reserves during the phase-in period to full funding. This, coupled with Ashfield-Colborne-Wawanosh's judicious use of debt in the past, allows the scenarios to assume that, if required, available reserves and debt capacity can be used for emergency situations until reserves are built to desired levels. This will allow the Township of Ashfield-Colborne-Wawanosh to address high priority infrastructure investments in the short to medium-term.

7.6.2 Recommendation

As the Township of Ashfield-Colborne-Wawanosh updates its AMP and expands it to include other asset categories, that future planning should include determining what its long-term reserve balance requirements are and a plan to achieve such balances in the long-term.

8.0 Appendix A: Report Card Calculations

Key Calculations

1. "Weighted, unadjusted star rating":

(% of assets in given condition) × (potential star rating)

2. "Adjusted star rating"

(weighted, unadjusted star rating) × (% of total replacement value)

3. "Overall Rating"

(Condition vs. Performance star rating) + (Funding vs. Need star rating)

2

Grade Cutoffs

1. Conditions vs Performance

Letter Grade	Star Rating
F	0
D	2
D+	2.5
C	2.9
C+	3.5
B	3.9
B+	4.5
A	4.9
A	5

2. Funding vs Need

Funding %	Star rating	Grade
0.0%	0	F
25.0%	1	F
46.0%	1.9	D
61.0%	2.9	C
76.0%	3.9	B
91.0%	4.9	A
100.0%	5	A

Roads Ashfield-Colborne-Wawanosh

1. Condition vs. Performance

Total category replacement value		\$56,568,407		Segment replacement value	\$56,568,407	Segment value as a % of total category replacement value		100.0%
Segment	Condition	Letter grade	Star rating	Quantity (m) in given condition	% of Assets in given condition	Weighted, unadjusted star rating	Segment adjusted star rating	
Surface and base	Excellent	A	5	39,630	15%	0.73	3.0	
	Good	B	4	106,180	39%	1.56		
	Fair	C	3	15,570	6%	0.17		
	Poor	D	2	25,670	9%	0.19		
	Critical	F	1	85,140	31%	0.31		
			Totals	272,190	100%	2.96		

							Category star rating	Category letter grade
							3.0	C

2. Funding vs. Need

Average annual investment required	2013 funding available	Funding percentage	Deficit			Category star rating	Category letter grade
\$1,468,000	\$627,000	42.7%	\$841,000			1.0	F

3. Overall Rating

Condition vs Performance star rating	Funding vs. Need star rating	Average star rating	Overall letter grade
3.0	1.0	2.0	D

1. Condition vs. Performance

Total category replacement value				Segment replacement value		Segment value as a % of total category replacement value	
\$20,277,499				\$14,700,626		72.5%	
Segment	Condition	Letter grade	Star rating	Quantity (m.sq) in given condition	% of Assets in given condition	Weighted, unadjusted star rating	Segment adjusted star rating
Bridges & culverts	Excellent	A	5	240	3%	0.16	1.4
	Good	B	4	87	1%	0.05	
	Fair	C	3	1,851	25%	0.74	
	Poor	D	2	2,291	30%	0.61	
	Critical	F	1	3,077	41%	0.41	
			Totals	7,546	100%	1.96	

Total category replacement value				Segment replacement value		Segment value as a % of total category replacement value	
\$20,277,499				\$5,576,873		27.5%	
Segment	Condition	Letter grade	Star rating	Units in given condition	% of Assets in given condition	Weighted, unadjusted star rating	Segment adjusted star rating
Bridges & culverts	Excellent	A	5	12	29%	1.46	0.8
	Good	B	4	5	12%	0.49	
	Fair	C	3	5	12%	0.37	
	Poor	D	2	4	10%	0.20	
	Critical	F	1	15	37%	0.37	
			Totals	41	100%	2.88	

						Category star rating	Category letter grade
						2.2	D

2. Funding vs. Need

Average annual investment required	2013 funding available	Funding percentage	Deficit			Category star rating	Category letter grade
\$358,000	\$191,000	53.4%	\$167,000			1.9	D

3. Overall Rating

Condition vs Performance star rating	Funding vs. Need star rating	Average star rating	Overall letter grade
2.2	1.9	2.0	D

1. Condition vs. Performance

Total category replacement value		\$6,060,253		Segment replacement value		\$3,917,631		Segment value as a % of total category replacement value		64.6%	
Segment	Condition	Letter grade	Star rating	Quantity (m) in given condition		% of Assets in given condition		Weighted, unadjusted star rating		Segment adjusted star rating	
Mains	Excellent	A	5	11,105		75%		3.73		3.0	
	Good	B	4	1,523		10%		0.41			
	Fair	C	3	2,278		15%		0.46			
	Poor	D	2	0		0%		0.00			
	Critical	F	1	0		0%		0.00			
			Totals	14,906		100%		4.59			

Total category replacement value		\$6,060,253		Segment replacement value		\$2,142,622		Segment value as a % of total category replacement value		35.4%	
Segment	Condition	Letter grade	Star rating	Quantities (\$) given condition		% of Assets in given condition		Weighted, unadjusted star rating		Segment adjusted star rating	
Facilities	Excellent	A	5	\$626,240		29%		1.46		1.2	
	Good	B	4	\$417,792		19%		0.78			
	Fair	C	3	\$710,584		33%		0.99			
	Poor	D	2	\$248,901		12%		0.23			
	Critical	F	1	\$139,106		6%		0.06			
			Totals	\$2,142,623		100%		3.53			

							Category star rating	Category letter grade
							4.2	B

2. Funding vs. Need

Average annual investment required	2013 funding available	Funding percentage	Deficit			Category star rating	Category letter grade
\$129,000	\$129,000	100.0%	\$0			5.0	A

3. Overall Rating

Condition vs Performance star rating	Funding vs. Need star rating	Average star rating	Overall letter grade
4.2	5.0	4.6	B+

1. Condition vs. Performance

Total category replacement value		\$3,006,341		Segment replacement value		\$908,830		Segment value as a % of total category replacement value		30.2%	
Segment	Condition	Letter grade	Star rating	Quantity (m) in given condition	% of Assets in given condition	Weighted, unadjusted star rating		Segment adjusted star rating			
Mains	Excellent	A	5	997	50%	2.49		1.3			
	Good	B	4	799	40%	1.60					
	Fair	C	3	31	2%	0.05					
	Poor	D	2	175	9%	0.17					
	Critical	F	1	0	0%	0.00					
			Totals	2,002	100%	4.31					

Total category replacement value		\$3,006,341		Segment replacement value		\$2,097,511		Segment value as a % of total category replacement value		69.8%	
Segment	Condition	Letter grade	Star rating	Units in given condition	% of Assets in given condition	Weighted, unadjusted star rating	Segment adjusted star rating				
Catch basins, manholes, misc.	Excellent	A	5	10	100%	5.00	3.5				
	Good	B	4	0	0%	0.00					
	Fair	C	3	0	0%	0.00					
	Poor	D	2	0	0%	0.00					
	Critical	F	1	0	0%	0.00					
			Totals	10	100%	5.00					

								Category star rating	Category letter grade
								4.8	B+

2. Funding vs. Need


Average annual investment required	2013 funding available	Funding percentage	Deficit			Category star rating	Category letter grade
\$34,000	\$17,000	50.0%	\$17,000			1.9	D

3. Overall Rating

Condition vs Performance star rating	Funding vs. Need star rating	Average star rating	Overall letter grade
4.8	1.9	3.3	C

Infrastructure Replacement Cost Per Household

Total: \$67,547 per household

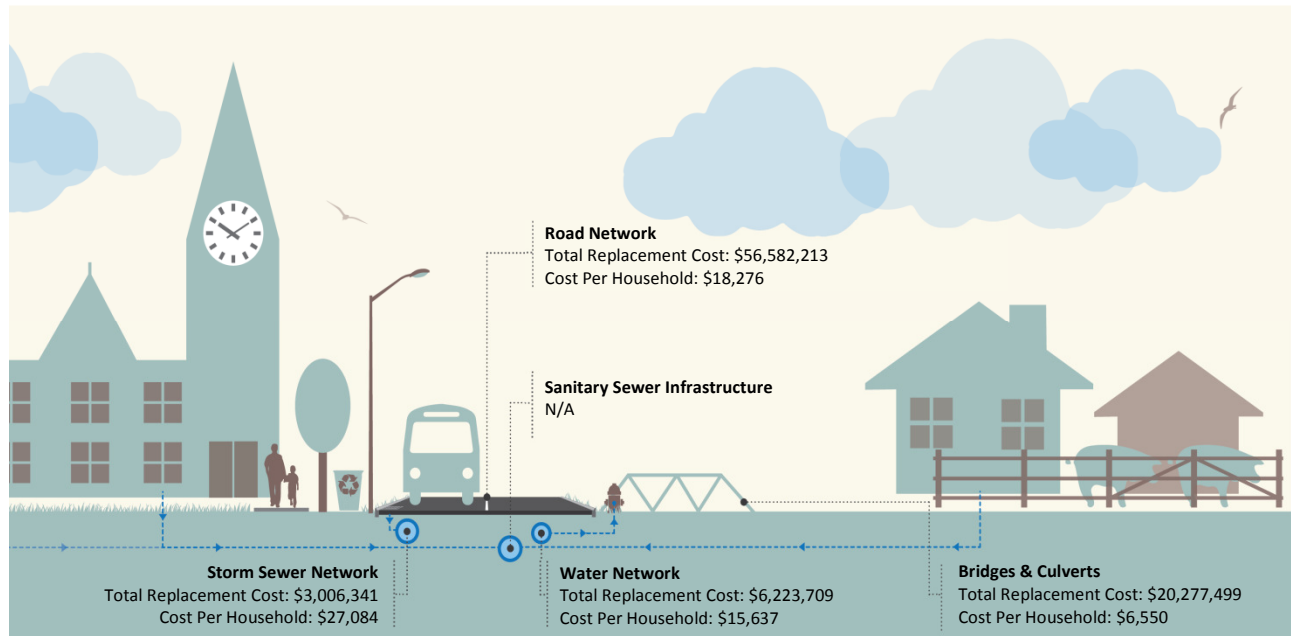

Daily Investment Required Per Household for Infrastructure Sustainability

